

LOC/DME I-EAU
109.5
Chan **32**

APP CRS
044°

Rwy Ldg
TDZE
Apt Elev
7701
889
913

LOC BC RWY 4
CHIPPEWA VALLEY RGNL (EAU)


▼

▲

DME required. VDP NA with Rice Lake Rgnl/Carl's Fld airport altimeter setting. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld airport altimeter setting increase all MDA 120 feet, increase S-4 Cats C and D and Circling Cat C visibility ¼ mile. Circling Rwy 32 NA at night.

MISSED APPROACH: Climb to 2900 then left turn direct EAU VORTAC and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925
------------------------	--	---	---------------------------

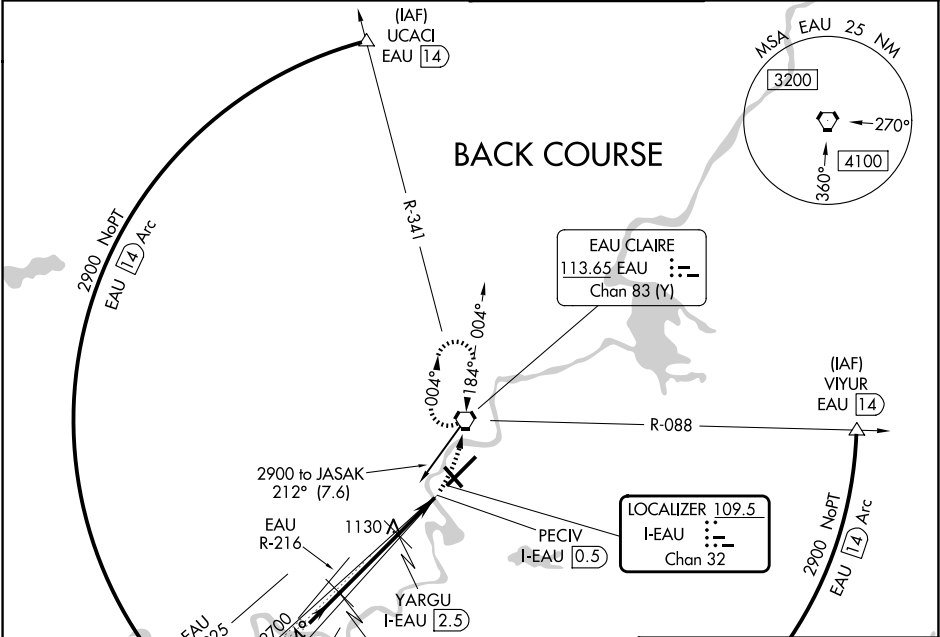

ELEV 913 D TDZE 889

Remain within 10 NM

2900

224°

044°

2700

Disregard GS indications.

JASAK I-EAU 5.4

Use I-EAU DME when on the localizer course.

YARGU I-EAU 2.5

I-EAU 1.3

PECIV I-EAU 0.5

3.00° TCH 44

1740

3 NM

1.2 NM

0.8 NM

0.6 NM

EAU

TWR

5000 X 100

8101 X 130 - 0.6% DOWN

004°

CATEGORY	A	B	C	D
S-4	1380-1	491 (500-1)	1380-1¾	491 (500-1¾)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)

HIRL Rwy 4-22 0
MIRL Rwy 14-32 0
REIL Rwy 4 and 14 0