

LOC I-TIW	APP CRS	Rwy Ldg	5002
109.1	167°	TDZE	294
		Apt Elev	295

ILS or LOC RWY 17

TACOMA NARROWS (TIW)


⚠ When control tower closed, obtain local altimeter setting on UNICOM, when not received, use McCord Fld altimeter setting minimums.

⚠ Circling not authorized east of Rwy 17-35.

MALSR

MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 via heading 290° and SEA VORTAC R-227 to SCENN INT and hold.

ATIS	SEATTLE APP CON	TACOMA TOWER★	GND CON	UNICOM
124.05	120.1 290.9	118.5 (CTAF) 0 253.5	121.8	122.95

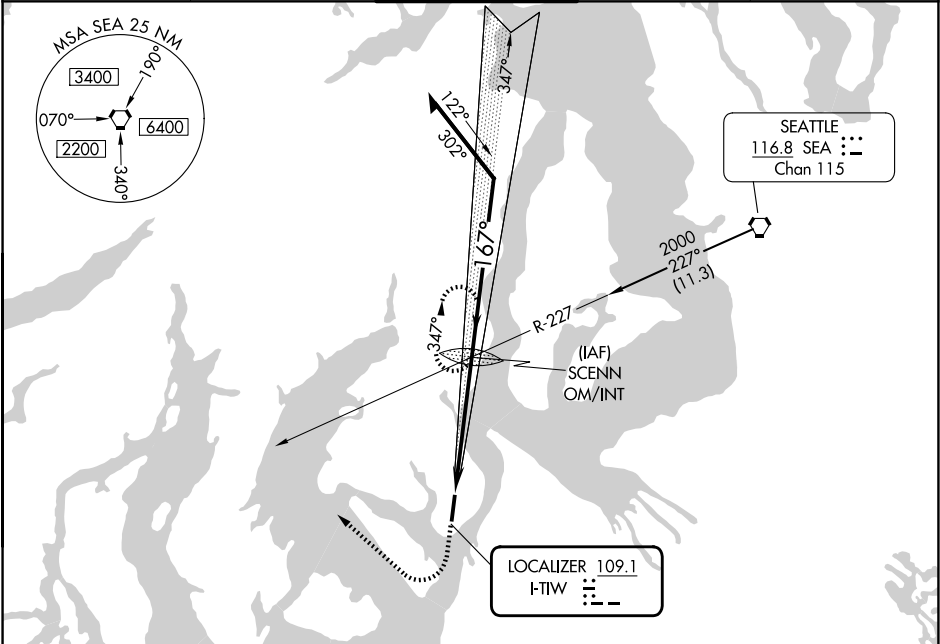

ELEV 295	TDZE 294	1500	2000	SEA R-227	SCENN INT	SCENN OM/INT	Remain within 10 NM
							GS 3.00° TCH 52
				5 NM			
				CATEGORY			
				A			B
				C			D
				S-ILS 17			494-1½ 200 (200-½)
				S-LOC 17			760-½ 466 (500-½) 760-¾ 466 (500-¾) 760-1 466 (500-1)
				CIRCLING			760-1 465 (500-1) 820-1½ 525 (600-1½) 860-2 565 (600-2)
				MCCHORD FLD ALTIMETER SETTING MINIMUMS			
				S-ILS 17			519-½ 225 (300-½)
				S-LOC 17			780-½ 486 (500-½) 780-¾ 486 (500-¾) 780-1 486 (500-1)
				CIRCLING			800-1 505 (600-1) 860-1½ 565 (600-1½) 900-2 605 (700-2)
				Knots			60 90 120 150 180
				Min:Sec			5:00 3:20 2:30 2:00 1:40

NW-1, 09 JUL 2026 to 06 AUG 2026

NW-1, 09 JUL 2026 to 06 AUG 2026