

WAAS CH 70348 W18A	APP CRS 180°	Rwy Ldg 4501 TDZE 1326 Apt Elev 1326
--	------------------------	---

RNAV (GPS) RWY 18
AUGUSTA MUNI (3AU)

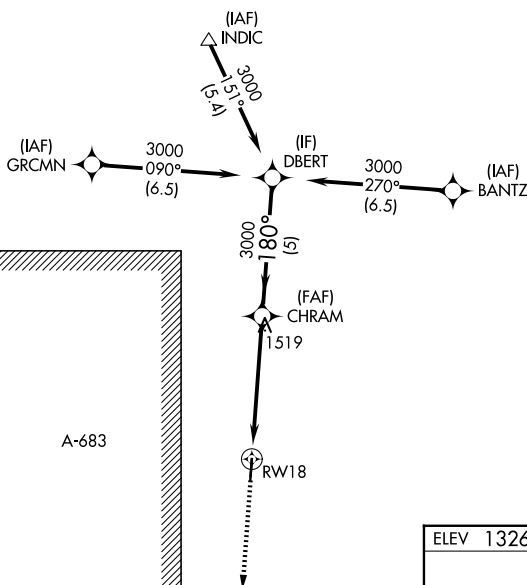
RNP APCH - GPS.

T Rwy 18 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AAO altimeter setting. When local altimeter setting not received, use AAO altimeter setting and increase LPV DA to 1624 feet; increase LNAV/VNAV DA to 1742 feet; increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 3000 direct WAKOP and hold.

AWOS-3P
124.175

WICHITA APP CON
134.8 269.1

CLNC DEL
125.0UNICOM
122.8 (CTAF) **L**

MSA RW18 25 NM

3600

MISSED APCH FIX

3000	WAKOP
	

GP 3.00°
TCH 40

CATEGORY		A	B	C	D
LPV	DA	1591-1 265 (300-1)			NA
INAV/ VNAV	DA	1709-1½ 383 (400-1½)			NA
INAV	MDA	1760-1 434 (500-1)		1760-1¼ 434 (500-1¼)	NA
CIRCLING		1800-1 474 (500-1)	1820-1 494 (500-1)	1820-1½ 494 (500-1½)	NA

ELEV 1326	TDZE 1326
-----------	-----------

← 180°

REIL Rwy 18 and 36 **L**
MIRL Rwy 18-36 **L**

RNAV (GPS) RWY 18