

WAAS CH 82204 W18A	APP CRS 181°	Rwy Ldg TDZE 999 Apt Elev 1004
--	------------------------	--

RNAV (GPS) RWY 18


KANSAS CITY/LEE'S SUMMIT RGNL (LX'T)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
Rwy 18 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Downtown/Wheeler Fld altimeter setting. When local altimeter setting not received, use Kansas City Downtown/Wheeler Fld altimeter setting: increase LPV DA to 1317 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1434 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV visibility Cat C and D ¾ SM, Circling Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct WOMPO and hold.

ASOS 124.175	KANSAS CITY APP CON 118.4 307.35	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

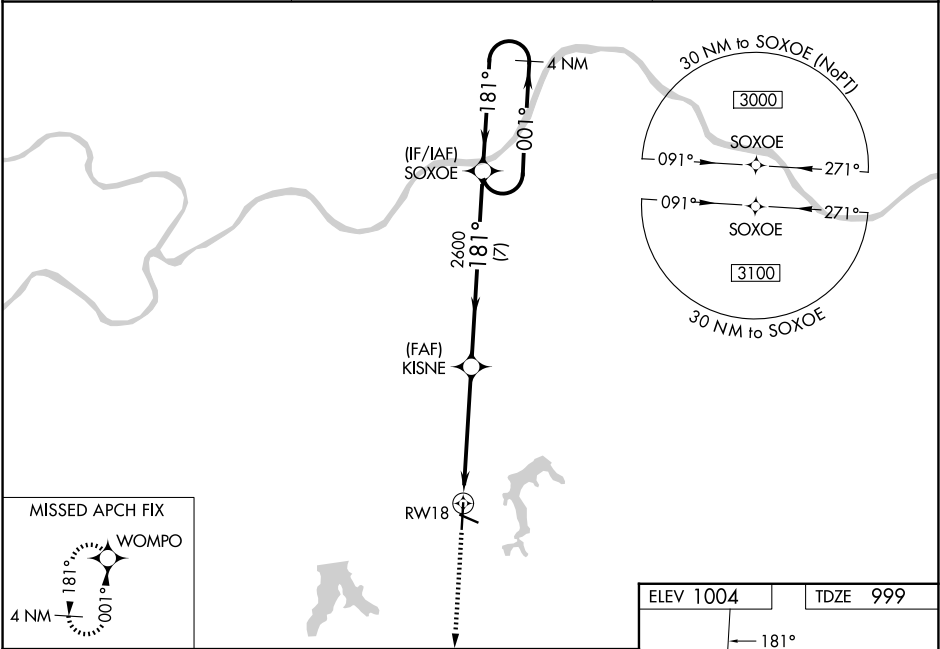

3000 ↑ WOMPO		KISNE		SOXOE		4 NM Holding Pattern	
*LNAV only		*1 NM to RW18		2600		001° → 3000 ← 181°	
RW18		1 NM		3.9 NM		GP 3.00° TCH 44	
1 NM		3.9 NM		7 NM			
CATEGORY	A	B	C	D			
LPV DA	1249-¾		250 (300-¾)				
LNAV/ VNAV DA	1366-1		367 (400-1)				
LNAV MDA	1360-1		361 (400-1)				
CIRCLING	1440-1 436 (500-1)	1540-1 536 (600-1)	1780-2¼ 776 (800-2¼)	1780-2½ 776 (800-2½)			

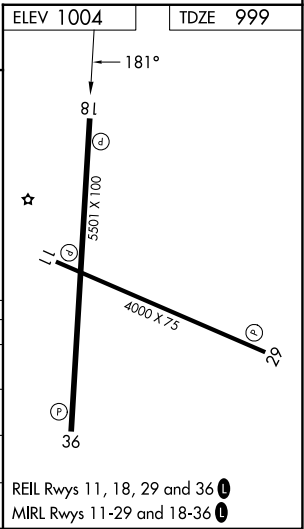

NC-3, 09 JUL 2026 to 06 AUG 2026

NC-3, 09 JUL 2026 to 06 AUG 2026