



APP CRS	Rwy Ldg	12000
353°	TDZE	5434
	Apt Elev	5434


RNAV (RNP) Z RWY 35L

DENVER INTL (DEN)

RNP AR APCH - GPS. Authorization required.	ALSF-2	MISSED APPROACH: Climb to 10000 direct MAXPU and track 360° to GLL VOR/DME and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -26°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4500. Simultaneous approach authorized.		

D-ATIS 125.6 379.9	DENVER APP CON 119.3 307.3 (N) 120.35 379.3 (S)	DENVER TOWER 124.3 322.45	GND CON 121.35 379.175 (W) 121.85 377.1 (E)
-----------------------	---	------------------------------	---

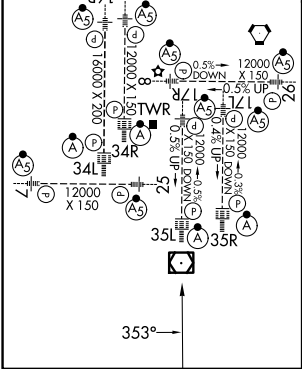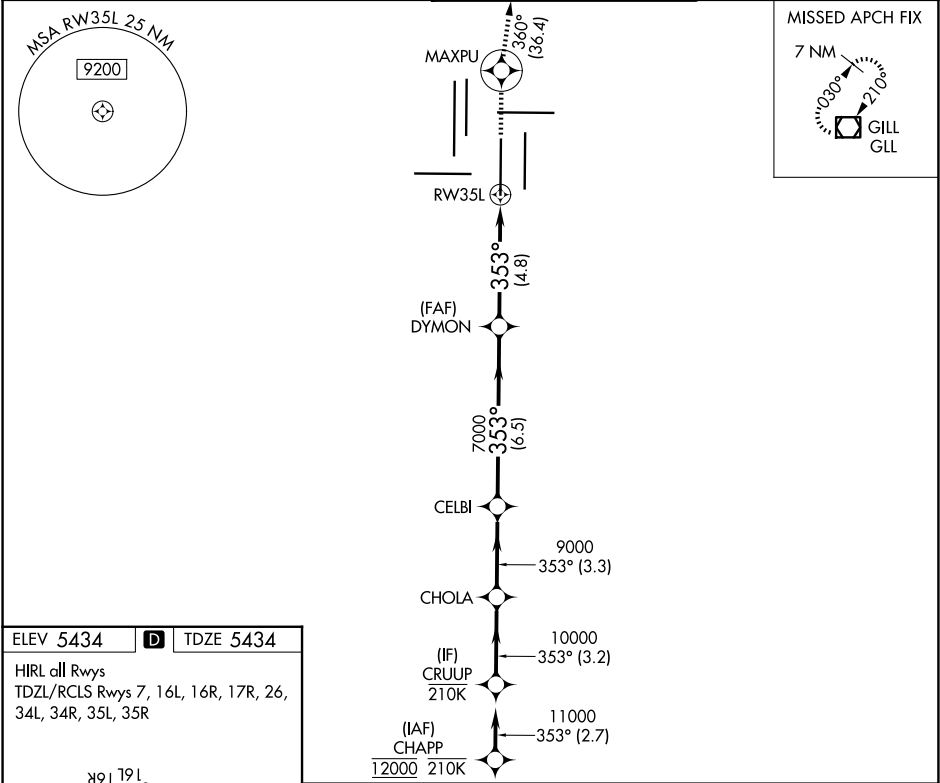

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).					10000 ↑	MAXPU 	tr 360°	GLL 
CRUUP	CHOLA	CELBI	DYMON	RW35L				
11000	10000	9000	7000					
GP 3.00° TCH 53								
CATEGORY	A		B	C	D			
RNP 0.10 DA	5695/24		261 (300-½)					
RNP 0.30 DA	5760/26		326 (400-½)					
AUTHORIZATION REQUIRED								

SW-1, 09 JUL 2026 to 06 AUG 2026

SW-1, 09 JUL 2026 to 06 AUG 2026