

(KER6.KER) 26190

AL-9155 (FAA)


CONCORD-PADGETT RGNL (JQF)
CONCORD, NORTH CAROLINA

KERMIT SIX DEPARTURE

CHARLOTTE DEP CON
128.325 307.8
ATIS
133.675
CLNC DEL
118.55
CLNC DEL (When twr closed)
127.25
GND CON
121.85
CONCORD TOWER ★
134.65 (CTAF)

RADAR and DME required.

TOP ALTITUDE:
3000

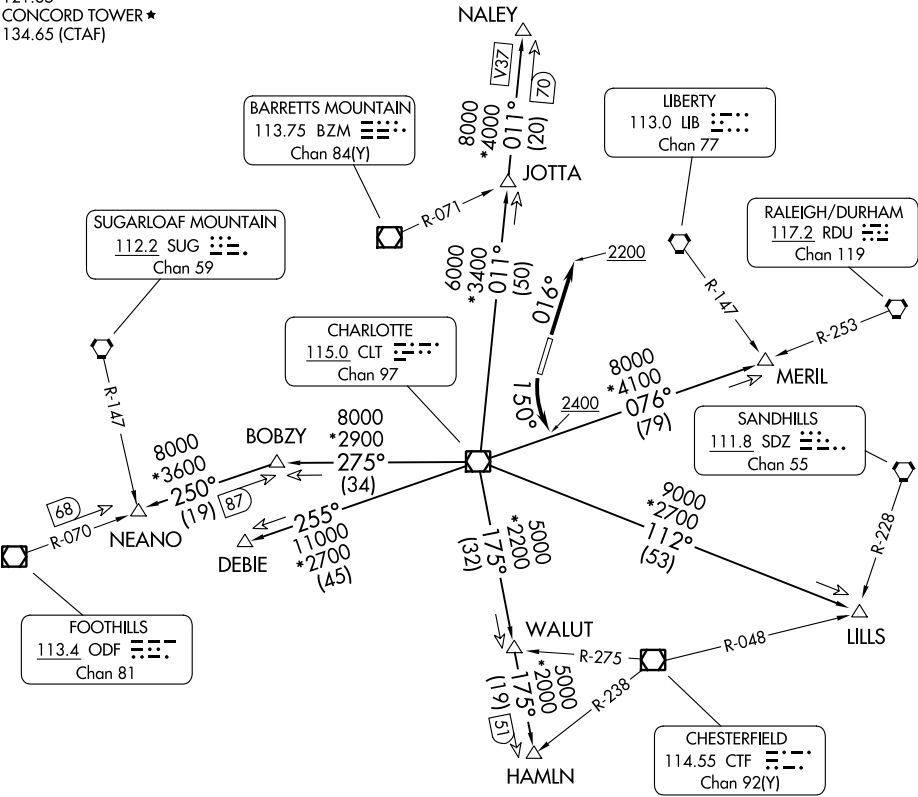

TAKEOFF MINIMUMS


Rwy 2: Standard.

Rwy 20: Standard with minimum climb of 320'/NM to 2400.

NOTE: Turbojets only.

NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

NOTE: Transponder code will be issued via Concord ATCT or Charlotte clearance delivery.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

KERMIT SIX DEPARTURE

(KER6.KER) 09JUL26

CONCORD, NORTH CAROLINA
CONCORD-PADGETT RGNL (JQF)

SE-2, 09 JUL 2026 to 06 AUG 2026

SE-2, 09 JUL 2026 to 06 AUG 2026



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb on heading 016° to 2200, thence. . .
TAKEOFF RUNWAY 20: Climbing left turn heading 150° to 2400, thence. . .

. . . on RADAR vectors to intercept filed/assigned transition or enroute fix/navaid.
Maintain 3000, expect filed altitude 10 minutes after departure.

- DEBIE TRANSITION (KER6.DEBIE): From over CLT VOR/DME on CLT R-255 to DEBIE.
- HAMLN TRANSITION (KER6.HAMLN): From over CLT VOR/DME on CLT R-175 to HAMLN.
- JOTTA TRANSITION (KER6.JOTTA): From over CLT VOR/DME on CLT R-011 to JOTTA.
- LILLS TRANSITION (KER6.LILLS): From over CLT VOR/DME on CLT R-112 to LILLS.
- MERIL TRANSITION (KER6.MERIL): From over CLT VOR/DME on CLT R-076 to MERIL.
- NALEY TRANSITION (KER6.NALEY): From over CLT VOR/DME on CLT R-011 to NALEY.
- NEANO TRANSITION (KER6.NEANO): From over CLT VOR/DME on CLT R-275 to BOBZY, then on ODF R-070 to NEANO.

SE-2, 09 JUL 2026 to 06 AUG 2026

SE-2, 09 JUL 2026 to 06 AUG 2026