

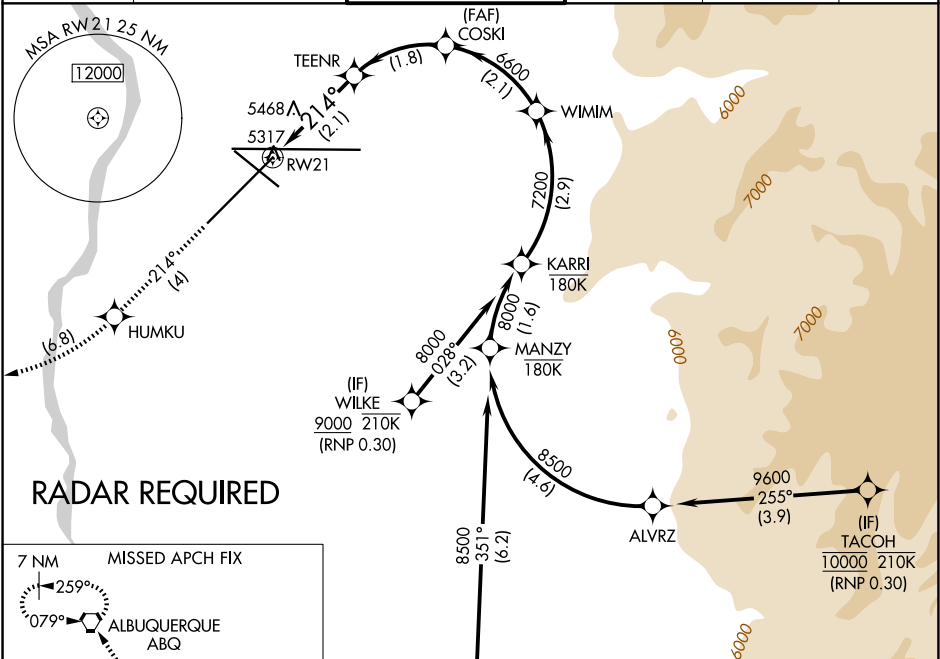
APP CRS	Rwy Ldg	10000
214°	TDZE	5316
	Apt Elev	5355




RNAV (RNP) Z RWY 21


ALBUQUERQUE INTL SUNPORT (ABQ)

ASR	For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 47°C (116°F). RF required. GPS required.	MISSED APPROACH: Climb to 8000 on track 214° to HUMKU, right turn to WAPMA, then on track 315° to ABQ VORTAC and hold.
-----	---	--

D-ATIS	ALBUQUERQUE APP CON	ALBUQUERQUE TOWER	GND CON	CLNC DEL	CPDLC
118.0 257.7	123.9 354.1	120.3 351.9	121.9 348.6	119.2 259.3	



 (not to scale)				 (IF) RMERO (IAF) PILLA 10000 210K (RNP 0.30)				
8000 ↑ tr 214°	HUMKU 		WAPMA 	tr 315° 	See planview for multiple IF locations.			
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).					KARRI			
 RW21 214°					TEENR 6030	COSKI 6600	WIMIM <u>7200</u>	8000
					2.1 NM	1.8 NM	2.1 NM	2.9 NM
CATEGORY	A		B		C		D	
RNP 0.30 DA	5755-1½ 439 (400-1½)							
AUTHORIZATION REQUIRED								

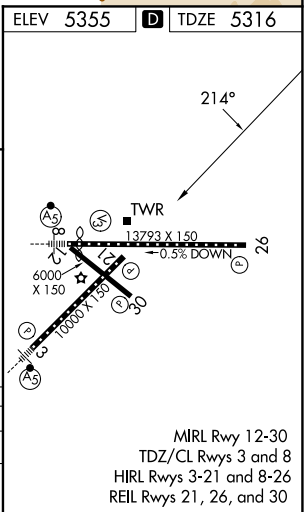

SW-1, 06 AUG 2026 to 03 SEP 2026

SW-1, 06 AUG 2026 to 03 SEP 2026