


(ATKNN5.ATKNN) 22307
ATKNN FIVE DEPARTURE (RNAV)

EL PASO INTL (ELP)
EL PASO, TEXAS

Rwy 8R: FLOGS and NOCHI Transitions standard with minimum climb of 500' per NM to 6000. GREBE and SLNNK Transitions standard with minimum climb of 500' per NM to 13500.

Rwy 22: FLOGS and NOCHI Transitions standard with minimum climb of 515' per NM to 7200. GREBE and SLNNK Transitions standard with minimum climb of 515' per NM to 13500.

Rwy 26L: FLOGS and NOCHI Transitions standard with minimum climb of 570' per NM to 6800. GREBE and SLNNK Transitions standard with minimum climb of 570' per NM to 13500.

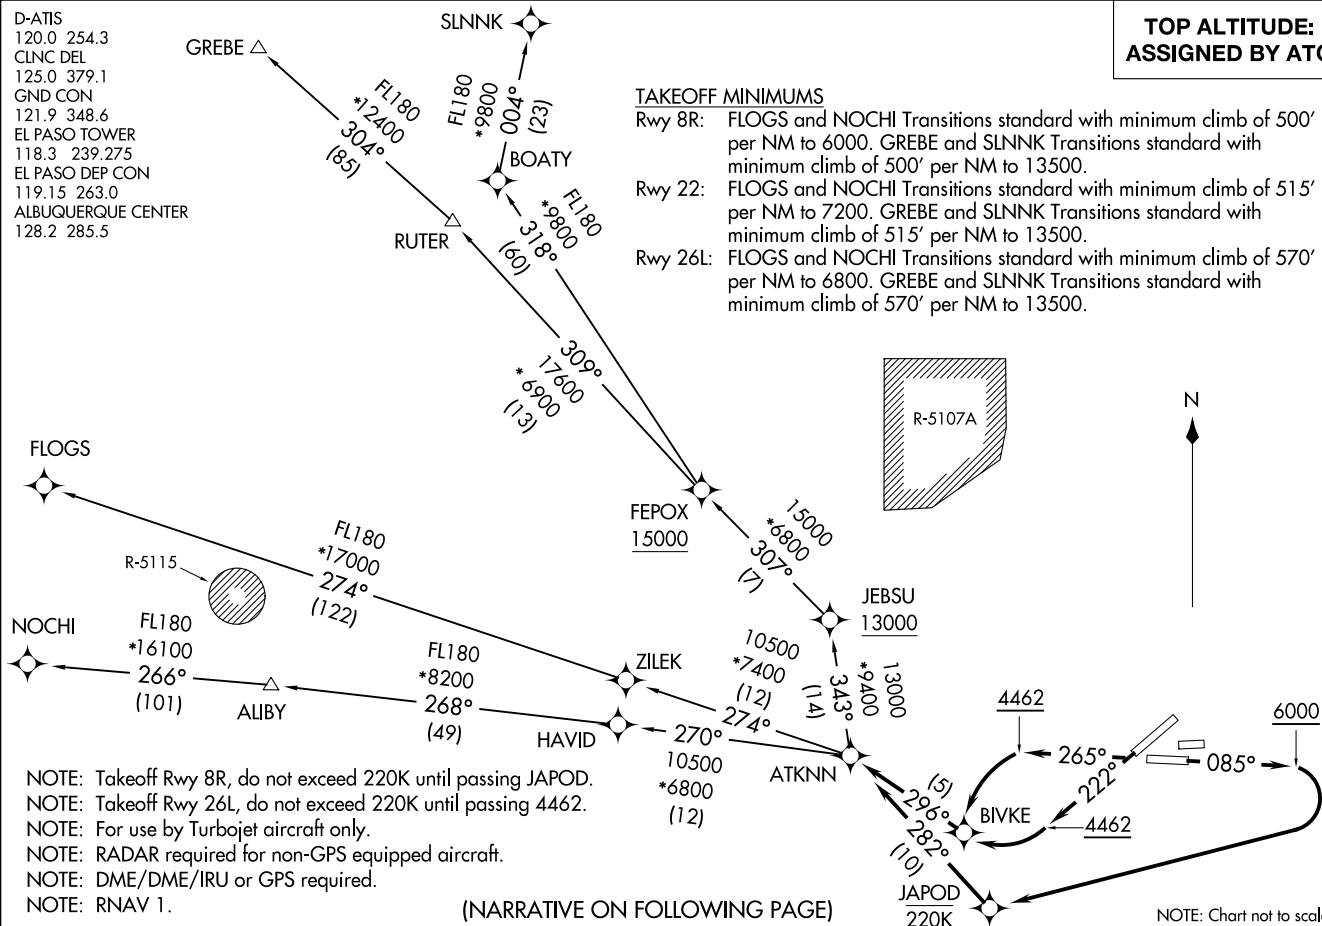

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

D-ATIS
120.0 254.3
CLNC DEL
125.0 379.1
GND CON
121.9 348.6
EL PASO TOWER
118.3 239.275
EL PASO DEP CON
119.15 263.0
ALBUQUERQUE CENTER
128.2 285.5

NOTE: Takeoff Rwy 8R, do not exceed 220K until passing JAPOD.
NOTE: Takeoff Rwy 26L, do not exceed 220K until passing 4462.
NOTE: For use by Turbojet aircraft only.
NOTE: RADAR required for non-GPS equipped aircraft.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1. (NARRATIVE)

ATKNN FIVE DEPARTURE (RNAV)
(ATKNN5.ATKNN) 21 JUL16

EL PASO, TEXAS
EL PASO INTL (ELP)



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 8R: Climb heading 085° to 6000, then right turn direct JAPOD, then on depicted route to ATKNN, thence . . .

TAKEOFF RWY 22: Climb heading 222° to 4462, then right turn direct BIVKE, then on depicted route to ATKNN, thence . . .

TAKEOFF RWY 26L: Climb heading 265° to 4462, then left turn direct BIVKE, then on depicted route to ATKNN, thence . . .

. . . (transition). Maintain altitude as assigned by ATC, expect filed altitude 10 minutes after departure.

- FLOGS TRANSITION (ATKNN5.FLOGS)
- GREBE TRANSITION (ATKNN5.GREBE)
- NOCHI TRANSITION (ATKNN5.NOCHI)
- SLNKK TRANSITION (ATKNN5.SLNKK)

SC-3, 06 AUG 2026 to 03 SEP 2026

SC-3, 06 AUG 2026 to 03 SEP 2026