

WAAS CH 90504 W22A	APP CRS 223°	Rwy Ldg 7300 TDZE 652 Apt Elev 680
--	------------------------	---

RNAV (GPS) RWY 22R

CHICAGO O'HARE INTL (ORD)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). Simultaneous approach authorized with Rwy 22L. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 4000 direct EVRSN and on track 263° to DPA VOR/DME and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON (TWR CENTER) 124.125 (TWR NORTH) 121.75 (OBND) 118.05 (TWR SOUTH) 121.9 (IBND) 226.675 (ALL TWRs)
--------------------------------	---	------------------------------------	---

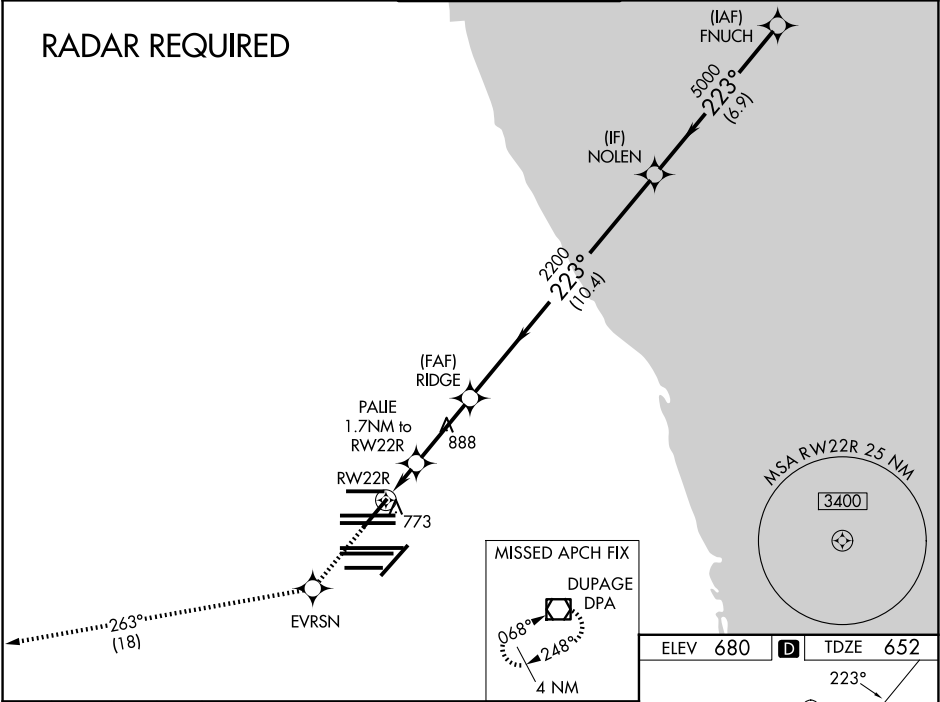

4000 EVRSN

tr 263°

DPA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

* LNAV only.

PALIE

1.7 NM to RW22R

RIDGE

2200

NOLEN

2200

FNUCH

7000

*1 NM to RW22R

1200

2200

5000

GP 3.00°

TCH 49

1 NM

0.7

3 NM

10.4 NM

6.9 NM

CATEGORY	A	B	C	D
LPV DA		852/18	200 (200-½)	
LNAV/ VNAV DA		972/32	320 (300-¾)	
LNAV MDA	1040/24	388 (400-½)	1040/35	388 (400-¾)
CIRCLING	1220-1	540 (600-1)	1220-1½ 540 (600-1½)	1460-2½ 780 (800-2½)

ELEV 680 D TDZE 652

CHICAGO, ILLINOIS
Amdt 2C 27FEB20

41°59'N-87°54'W

CHICAGO O'HARE INTL (ORD)

RNAV (GPS) RWY 22R

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026