
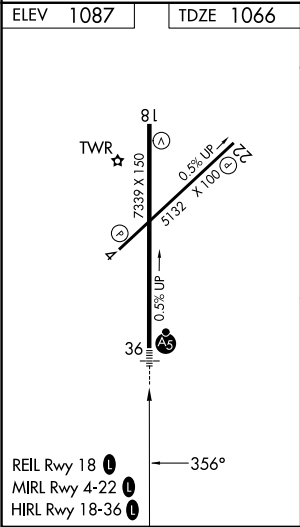


WAAS CH 81807 W36A	APP CRS 356°	Rwy Ldg TDZE 1066 Apt Elev 1087
--	------------------------	---

RNAV (GPS) RWY 36

NEW CENTURY AIRCENTER (IXD)

	DME/DME RNP-0.3 NA. For inop MALS, increase LNAV Cat D visibility to 1¼ and LPV visibility to 1 all Cats. If local altimeter setting not received, use Johnson County Exec altimeter setting and increase all DA/MDAs 20 feet. VDP NA with Johnson County Exec altimeter setting.			MALS	MISSED APPROACH: Climb to 3100 direct ZODPU and hold.
	ASOS 135.325	KANSAS CITY APP CON 118.9 251.075	NEW CENTURY TOWER ★ 133.0 (CTAF) 0	GND CON 124.3	UNICOM 122.95

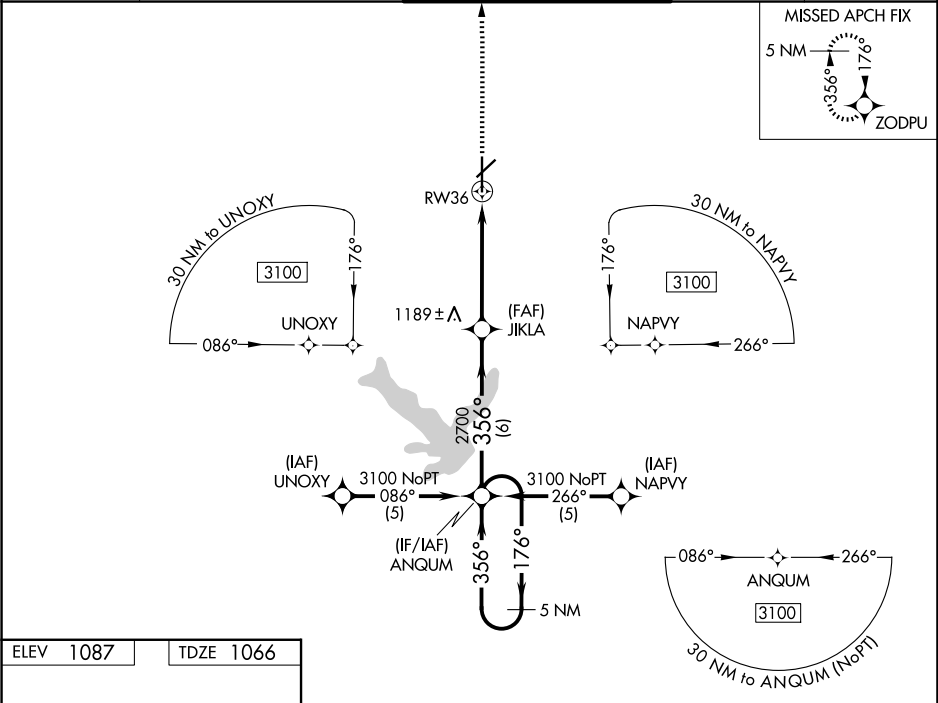

5 NM Holding Pattern	ANQUM	JIKLA	3100	ZODPU
3100	176°	356°	356°	*LNAV only.
GP 3.00°	TCH 50	2700	*1.1 NM to RW36	RW36
6 NM	3.9 NM	1.1 NM		
CATEGORY	A	B	C	D
LPV DA	1316-½ 250 (300-½)			
LNAV/VNAV DA	NA			
LNAV MDA	1440-½ 374 (400-½)		1440-1 374 (400-1)	
CIRCLING	1560-1 473 (500-1)		1580-1½ 493 (500-1½)	
			1640-2 553 (600-2)	