


VORTAC TXK	APP CRS	Rwy Ldg	4559
116.3	122°	TDZE	388
Chan 110		Apt Elev	390

VOR RWY 13
TEXARKANA RGNL-WEBB FLD (TXK)

⚠ When local altimeter setting not received, use De Queen altimeter setting and increase all MDA 100 feet, increase S-13 and Cat C and D visibility ¼ SM, and Circling Cat C and D visibility ¼ SM. Visibility reduction by helicopters NA. VDP NA when using De Queen altimeter setting.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct TXK VORTAC and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235.625	GND CON 119.225
---------------	--------------------------------------	---	--------------------

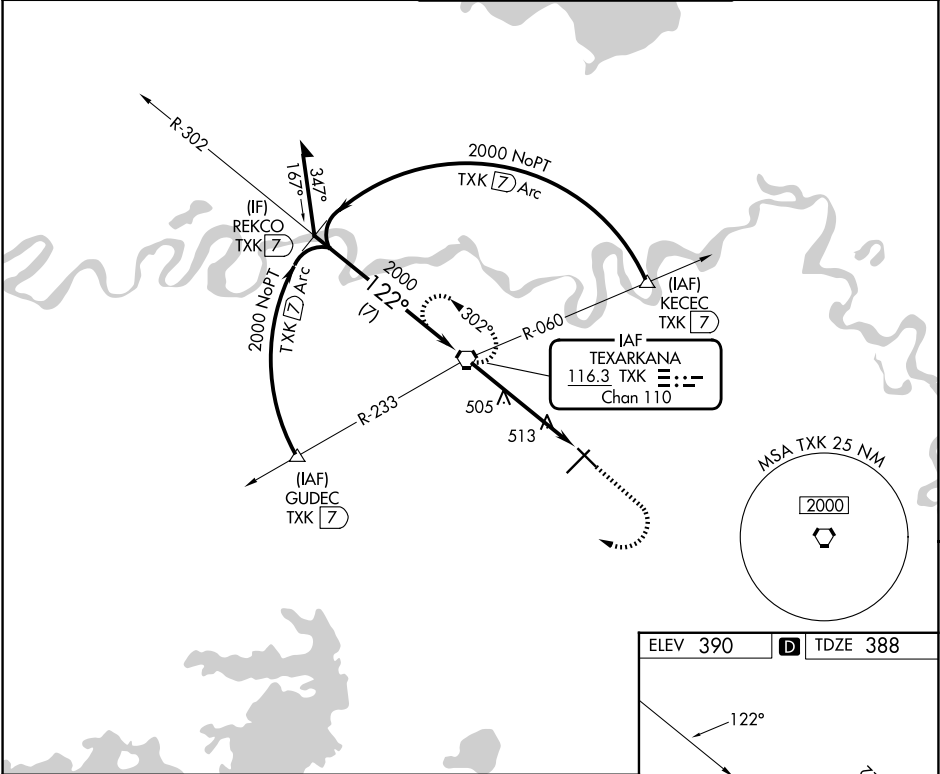

VGSI and descent angles not coincident (VGSI angle 3.00/TCH 48).

Remain within 10 NM

TXK VORTAC

2000 122° 2000

302°

2.85° TCH 54

TXK 4.1 TXK 5.2

4.1 NM 1.2 NM

CATEGORY	A	B	C	D
S-13	780-1 392 (400-1)		780-1 392 (400-1 3/8)	780-1 392 (400-1 1/4)
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000-1 610 (700-1 3/4)	1080-2 690 (700-2 1/4)

ELEV 390 TDZE 388

122°

TWR

13

51

5200 X 100

0.3% UP

6602 X 150

0.7% UP

MIRL Rwy 13-31

MIRL Rwy 4-22

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

SC-1, 06 AUG 2026 to 03 SEP 2026

SC-1, 06 AUG 2026 to 03 SEP 2026