

WAAS CH 72933 W32A	APP CRS 319°	Rwy Ldg TDZE 1268 Apt Elev 1268
--	------------------------	---

RNAV (GPS) RWY 32


SPRINGFIELD-BRANSON NTL (SGT')

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using HFJ altimeter setting. When local altimeter setting not received, use HFJ altimeter setting and increase LPV DA to 1608 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1820 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C and D ½ SM.


MISSED APPROACH: Climb to 3000 direct BVRLY and hold.

ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15
------------------------	--	---	--------------------------------

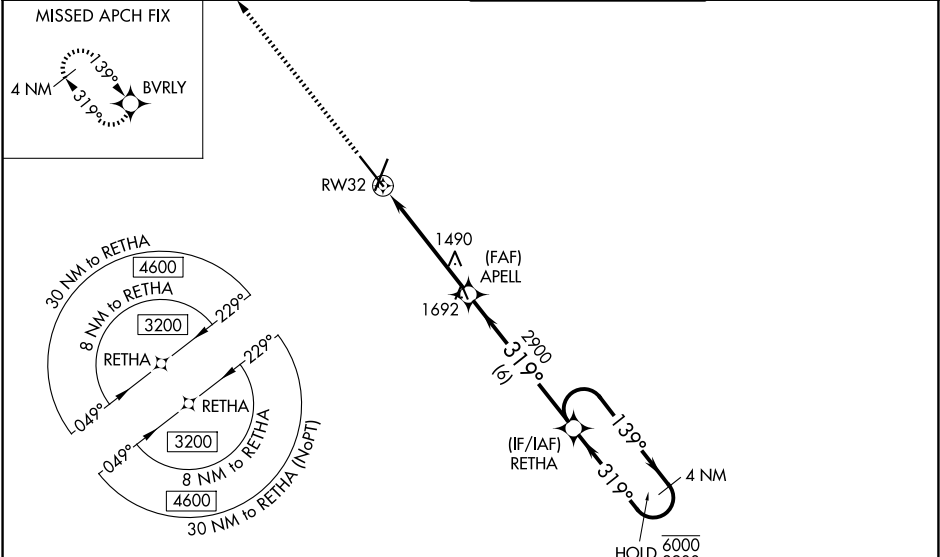

ELEV 1268	D	TDZE 1268
-----------	----------	-----------

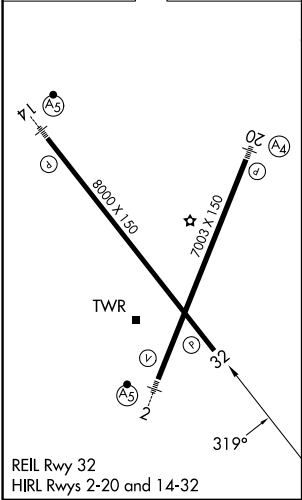

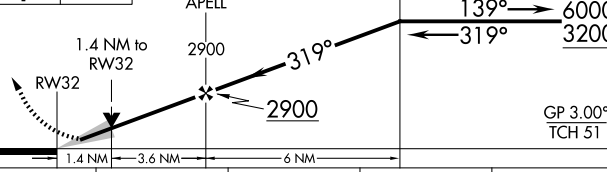3000	BVRLY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).			
					
CATEGORY		A	B	C	D
LPV DA		1518- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV/ VNAV	DA	1730-1 $\frac{3}{8}$ 462 (500-1 $\frac{3}{8}$)			
LNAV MDA		1740-1	472 (500-1)	1740-1 $\frac{3}{8}$	472 (500-1 $\frac{3}{8}$)
CIRCLING		1760-1 492 (500-1)	1820-1 552 (600-1)	1820-1 $\frac{1}{2}$ 552 (600-1 $\frac{1}{2}$)	1920-2 652 (700-2)

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026