


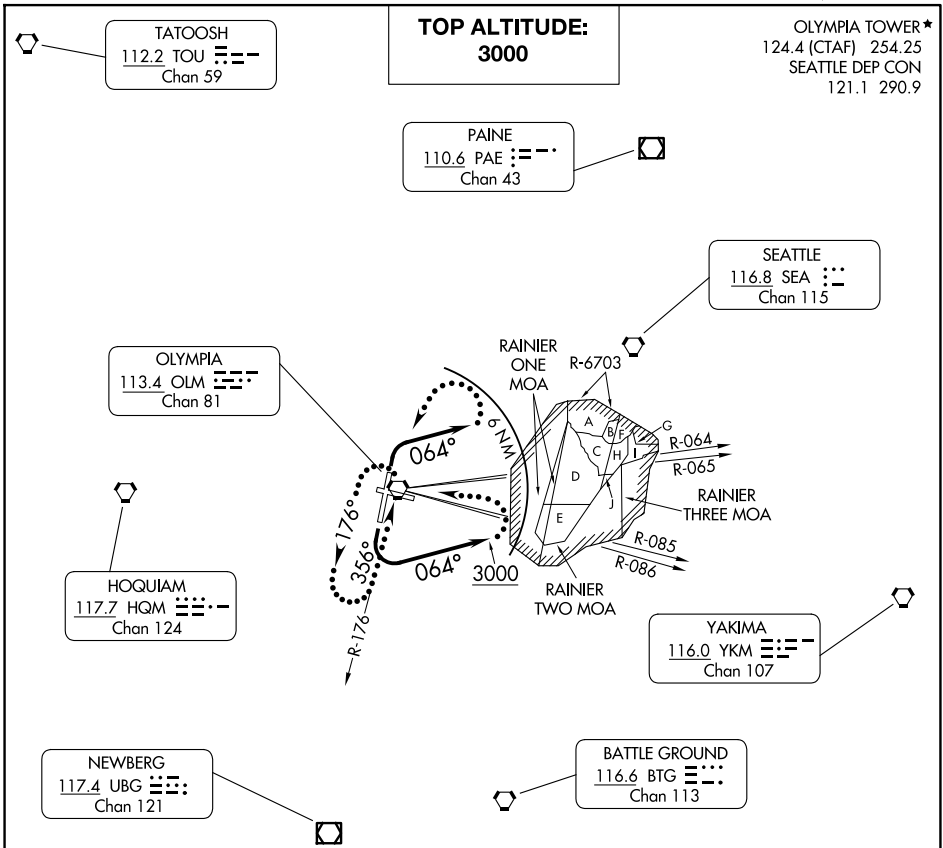

**TAKEOFF MINIMUMS**  
Rwys 8, 26: NA- ATC.  
Rwy 17: 300-2 with minimum climb of 210' per NM to 2200 or standard with minimum climb of 720' per NM to 500.  
Rwy 35: Standard.

**NOTE: RADAR required.**  
**NOTE: Chart not to scale.**

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RUNWAY 17:** Turn left, climb heading 064° to 3000, thence. . . .

**TAKEOFF RUNWAY 35:** Turn right, climb heading 064°, maintain 3000 thence. . . .

. . . .for RADAR vectors on course and filed altitude.

**LOST COMMUNICATIONS:** If no contact with ATC within 6 NM of OLM VORTAC, or 2 minutes after departure for non-DME aircraft, turn left direct OLM VORTAC, continue climb in OLM VORTAC holding pattern to cross OLM VORTAC at or above R-086 CW R-064 4200 feet; R-065 CW R-085 7300 feet, continue climb on assigned route.