



WAAS CH 65805 W13A	APP CRS 131°	Rwy Ldg TDZE 1500 Apt Elev 1500
--	------------------------	---

RNAV (GPS) RWY 13

JAMESTOWN RGNL (JMS)

▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Rwy 13 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 3500 direct FAMDU and hold.
--	---

ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

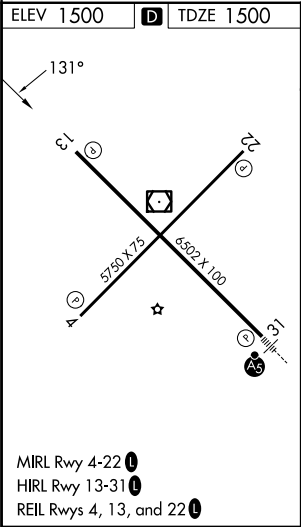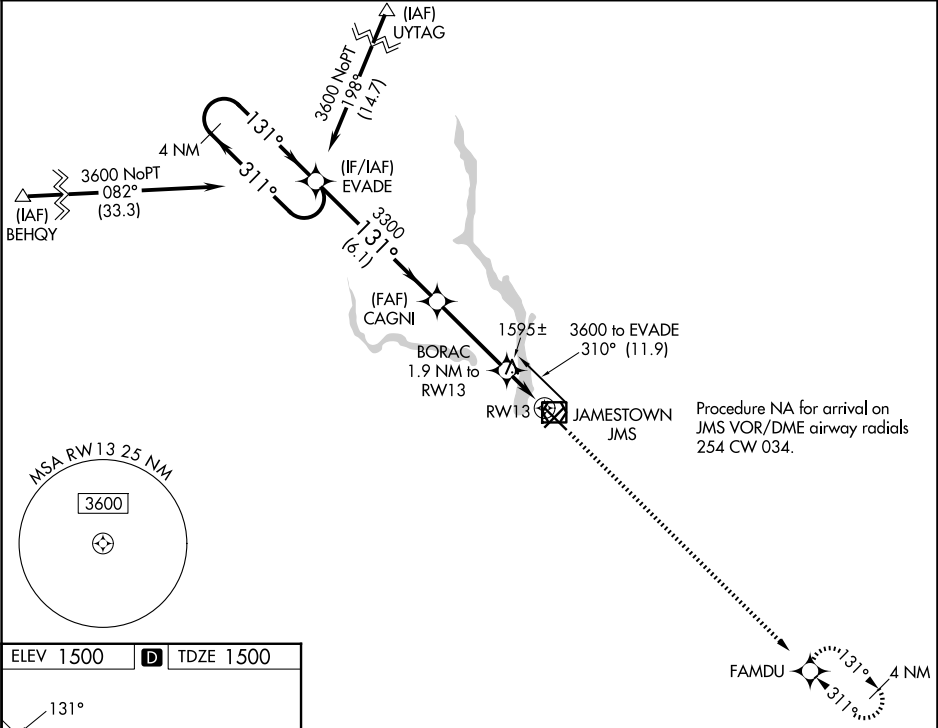

	4 NM Holding Pattern	EVADE	CAGNI	BORAC 1.9 NM to RWY13	3500	FAMDU
	3600	311°	131°	131°		
	GP 3.00°	TCH 52	3300	*2160	*1 NM to RWY13	*LNAV only
		6.1 NM	3.5 NM	0.9 NM	1 NM	
CATEGORY	A	B	C	D		
LPV DA		1787-1	287 (300-1)			
LNAV/VNAV DA		1820-1	320 (400-1)			
LNAV MDA		1860-1	360 (400-1)		1860-1¼	360 (400-1¼)
CIRCLING	1960-1	460 (500-1)	2000-1½	2300-2½	500 (500-1½)	800 (800-2½)