
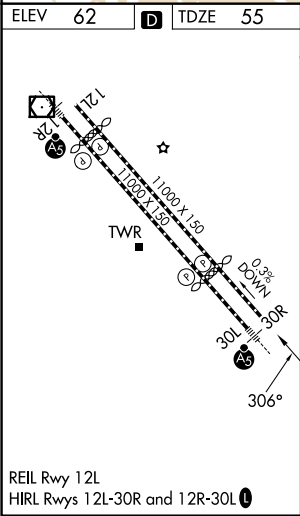


WAAS CH 72901 W30B	APP CRS 306°	Rwy Ldg TDZE Apt Elev	7597 55 62
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 30R

NORMAN Y MINETA SAN JOSE INTL (SJC)

RNP APCH-GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below +1°C or above 54°C.		MISSED APPROACH: Climb to 2300 direct MUSSK and hold.		
D-ATIS 126.95	NORCAL APP CON 120.1 290.25	SAN JOSE TOWER ★ 124.0 (CTAF) 0 257.6	GND CON 121.7	UNICOM 122.95

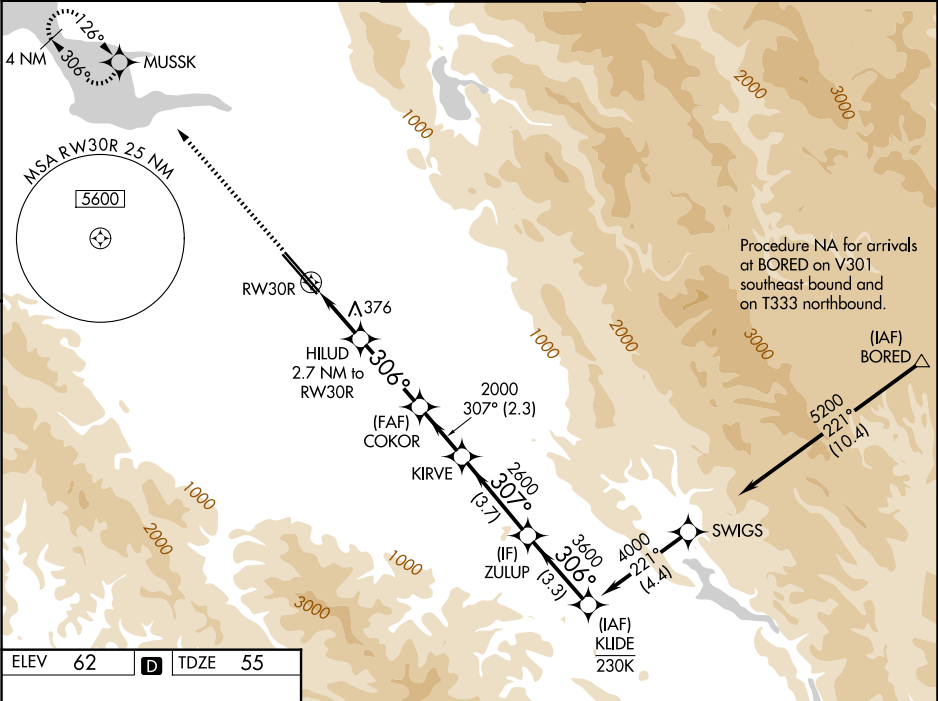

2300 MUSSK VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 69).		HILUD 2.7 NM to RW30R		COKOR 2000		KIRVE 2600		ZULUP 3600		KLIDE 4000	
1.6 NM to RW30R		1.1 NM		3.2 NM		2.3 NM		3.7 NM		3.3 NM	
CATEGORY		A		B		C		D			
LPV	DA	255-3/4		200 (200-3/4)							
LNAV/VNAV	DA	541-13/8		486 (500-13/8)							
LNAV	MDA	640-1 585 (600-1)		640-13/4 585 (600-13/4)							
CIRCLING		640-1 578 (600-1)		700-1 638 (700-1)		700-13/4 638 (700-13/4)		700-2 638 (700-2)			