

APP CRS	Rwy Ldg	6014
060°	TDZE	6
	Apt Elev	8

RNAV (RNP) Z RWY 6

TETERBORO (TEB)


RNP AR APCH - GPS.
RADAR required.

▼ For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1000, then climbing left turn to 2000 direct TEBLE, cross TEBLE at or below 2000, then climb to 3000 on track 272° to UBUCK and hold.

D-ATIS 114.2 132.85	NEWARK APP CON 127.6 379.9	TETERBORO TOWER 119.5	GND CON 121.9
------------------------	-------------------------------	--------------------------	------------------

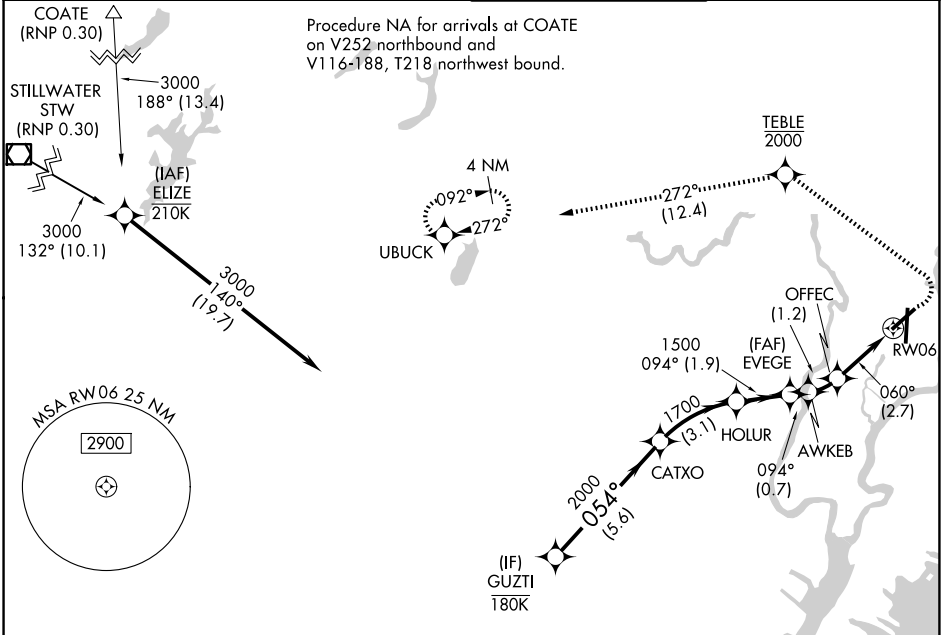

ELEV 8 TDZE 6

GP 3.00° TCH 53	5.6 NM	3.1 NM	1.9 NM	0.7 NM	1.2 NM	2.7 NM
CATEGORY	A	B	C	D		
RNP 0.30 DA	679-1½ 673 (700-1½)					

AUTHORIZATION REQUIRED

TDZL/RCLS Rwy 6 and 19
HIRL Rwy 1-19 and 6-24
REIL Rwy 1, 6, 19 and 24