

LOC/DME I-CLL
110.55
Chan **42(Y)**

APP CRS
346°

Rwy Ldg
TDZE **311**
Apt Elev **321**

ILS or LOC RWY 35
EASTERWOOD FLD (CLL)

ADF or DME required for procedure entry. ADF or DME required for LOC only.

▼

▲


For inop ALS, increase S-ILS 35 Cat E visibility to ¾ SM and S-LOC 35 Cat E visibility to 1¾ SM. ILS glideslope unusable for coupled approaches below 1050 feet MSL.

MALSR

AS

MISSED APPROACH: Climb to 2500 on I-CLL north course to DERRS INT/I-CLL 11.5 DME and hold.

ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER ★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

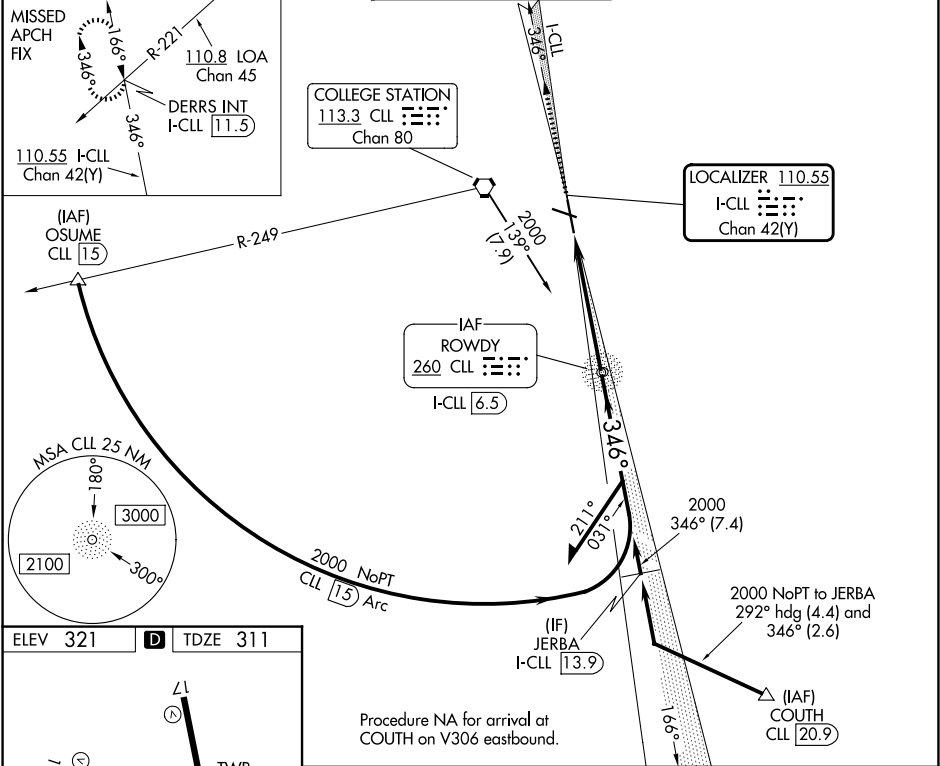

ELEV **321** **D** TDZE **311**

REIL Rwy 29
MIRL Rwy 11-29
HIRL Rwy 17-35

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

2500

I-CLL N crs

DERRS INT

CLL NDB I-CLL 6.5

Remain within 15 NM

176°

2000

346°

2000

GS 2.90° TCH 57

Use I-CLL DME when on the localizer course.

CATEGORY	A	B	C	D	E
S-ILS 35	511-1½ 200 (200-½)				
S-LOC 35	760-½ 449 (500-½) 760-⅞ 449 (500-⅞)				
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)

SC-5, 06 AUG 2026 to 03 SEP 2026

SC-5, 06 AUG 2026 to 03 SEP 2026