

NDB ICW 525	APP CRS 056°	Rwy Ldg TDZE Apt Elev	4600 368 368
-----------------------	------------------------	-----------------------------	---

NDB RWY 4L



NENANA MUNI (ENN)(PANN)

⚠



Procedure NA at night. Circling NA northwest of Rwy 4L-22R. Circling NA to Rwys 4R, 22L, 4W and 22V. Rwy 4L helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use FAI/PAFA altimeter setting and increase all MDAs 100 feet and S-4L visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climbing right turn to 3200 on ICW NDB bearing 130°, then left turn direct ICW NDB and hold.

ASOS 125.2	FAIRBANKS APP CON 125.35 363.2	FAIRBANKS RADIO 122.5	CTAF 122.10
----------------------	--	---------------------------------	-----------------------

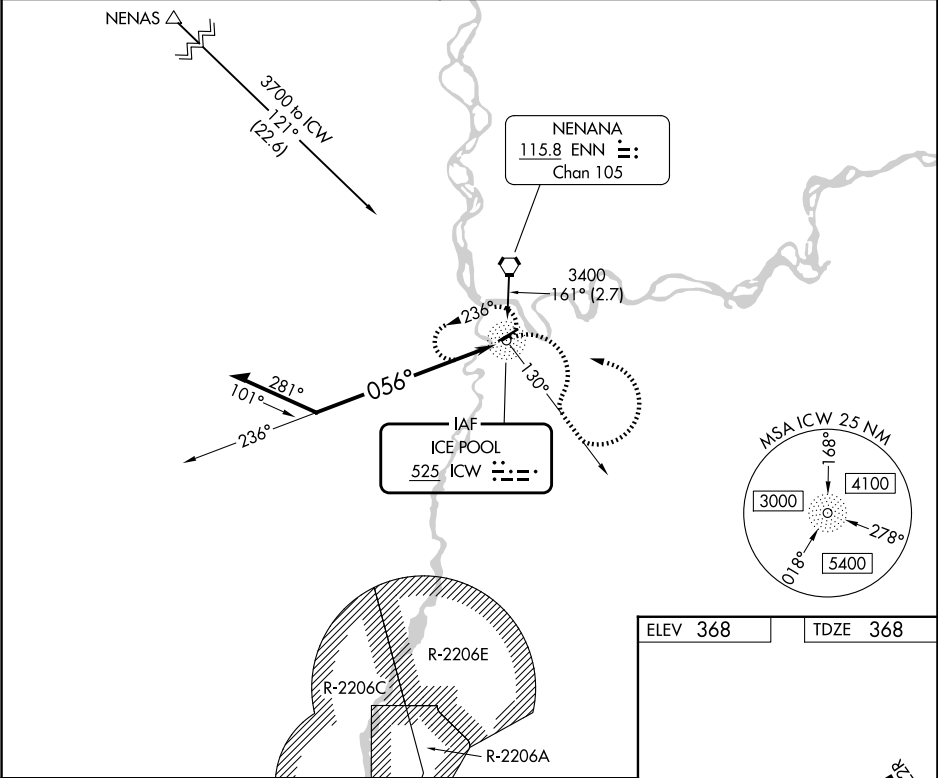

ELEV 368	TDZE 368
----------	----------

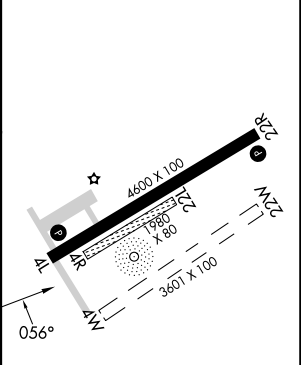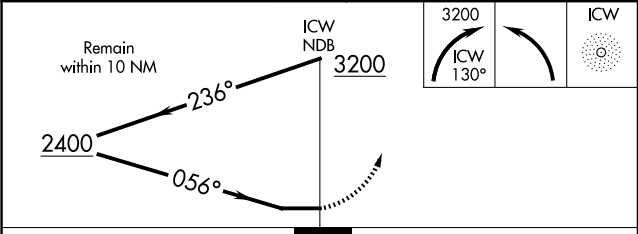

CATEGORY	A	B	C	D
S-4L	1000-1	632 (700-1)	1000-1¾	632 (700-1¾)
CIRCLING	1000-1	632 (700-1)	1140-2¼ 772 (800-2¼)	1140-2½ 772 (800-2½)

REIL Rwys 4L and 22R
MIRL Rwys 4L-22R
MIRL Rwys 4R-22L