


WAAS CH 40113 W08B	APP CRS 087°	Rwy Ldg TDZE 794 Apt Elev 794
--	------------------------	---

RNAV (GPS) RWY 8R

GERALD R FORD INTL (G.R.R.)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR 	MISSED APPROACH: Climb to 2700 direct CAVUS and on track 085° to SARAN and hold.	
ATIS 118.725	GREAT LAKES APP CON★ 128.4 257.6	GRAND RAPIDS TOWER★ 135.65 (CTAF) 0 339.8	GND CON 121.8	UNICOM 122.95

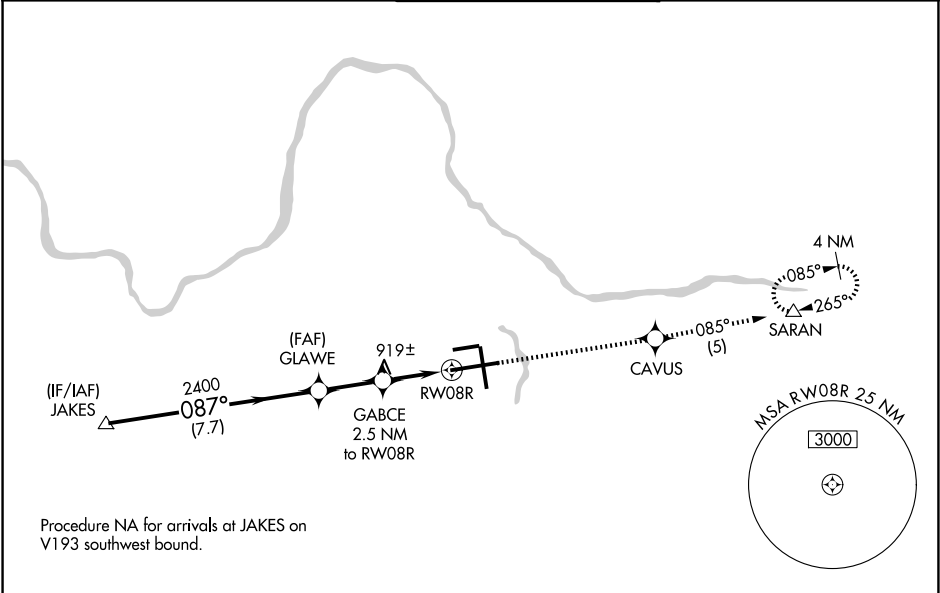

ELEV 794		D TDZE 794	
JAKES		2700 CAVUS tr 085° SARAN	
2700		*NAV only.	
GP 3.00° TCH 51		GABCE 2.5 NM to RW08R	
087°		*1.1 NM to RW08R	
2400		RW08R	
7.7 NM		1.4 NM	
2.3 NM		1.1 NM	
CATEGORY	A	B	C
LPV DA **	994/24		200 (200-½)
LNAV/VNAV DA	1297/50		503 (600-1)
LNAV MDA	1180/24	386 (400-½)	1180/35
			386 (400-1)
CIRCLING	1260-1	466 (500-1)	1340-1½
			546 (600-1½)
			1360-2
			566 (600-2)

MIRL Rwy 8L-26R 1
REIL Rwy 8L, 17 and 26R 1
HIRL Rwy 8R-26L and 17-35 1