

VORTAC CMI

115.75

APP CRS

025°

Rwy Ldg TDZE

N/A

N/A

N/A

Chan 104 (Y)

Apt Elev

735


VOR-A

FRASCA FLD (C16)

⚠ NA Circling NA to Rwys 18 and 36. Procedure NA at night. Use University of Illinois/Willard altimeter setting; when not received, use Decatur altimeter setting: increase all MDAs 80 feet and visibility Cats A and B ¼ SM, Cat C ½ SM and Cat D ¾ SM; increase FANUK fix minimum visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2500 on CMI VORTAC R-062 to OCTOE INT and hold.

CMI ASOS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 122.8 (CTAF)
--------------------	--------------------------------------	------------------------

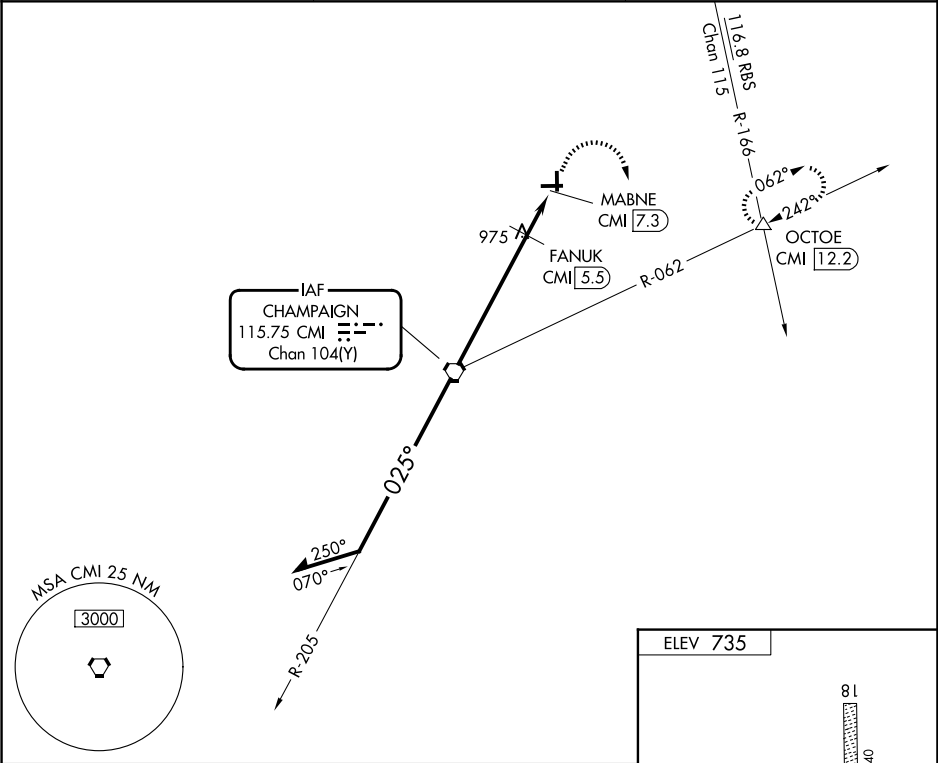

Remain within 10 NM

2000

2500

OCTOE

2500

205°

025°

2300*

1540

5.5 NM

1.8 NM

* 1620 when using Decatur altimeter setting.

FANUK CMI 5.5

MABNE CMI 7.3

CATEGORY	A	B	C	D
CIRCLING	1540-1	805 (900-1)	1540-2¼ 805 (900-2¼)	1560-2¾ 825 (900-2¾)

FANUK FIX MINIMUMS

CIRCLING	1300-1	565 (600-1)	1420-2 685 (700-2)	1560-2¾ 825 (900-2¾)
----------	--------	-------------	-----------------------	-------------------------

ELEV 735

81

3654 X 140

36

4001 X 55

0.3% UP

27

025°

MIRL Rwy 9-27

FAF to MAP 7.3 NM

Knots	60	90	120	150	180
Min:Sec	7:18	4:52	3:39	2:55	2:26

URBANA, ILLINOIS

Amdt 11C 16MAY24

40°09'N-88°12'W

FRASCA FLD (C16)

VOR-A