

WAAS CH 86420 W09A	APP CRS 092°	Rwy Ldg 5004 TDZE 905 Apt Elev 905
--	------------------------	---

RNAV (GPS) RWY 9R
OHIO STATE UNIVERSITY (OSU)

RNP APCH.

▼ Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting; for uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP NA with John Glenn Columbus Intl altimeter setting. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase LPV DA to 1140 feet; increase LNAV/VNAV DA to 1227 feet; increase all MDAs 40 feet and LNAV visibility Cat C ½ SM, Cat D ¼ SM and Circling Cat D ¼ SM. Circling Rwy 23 NA at night. For inop ALS, increase LNAV/VNAV visibility all Cats to ½ SM.



MALSR



MISSED APPROACH:
Climb to 3200 direct
KOLNY and hold.

ATIS 121.35	COLUMBUS APP CON 125.95 317.775	STATE TOWER ★ 118.8 (CTAF) 254.325	GND CON 121.7	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

Procedure NA for arrivals
on APE VORTAC
airway radials 189 CW 335.

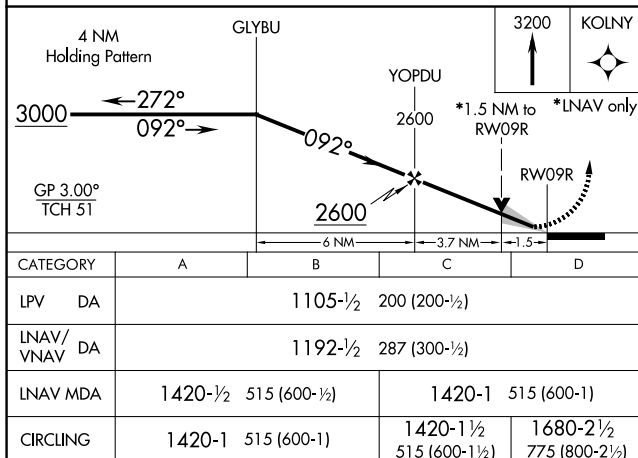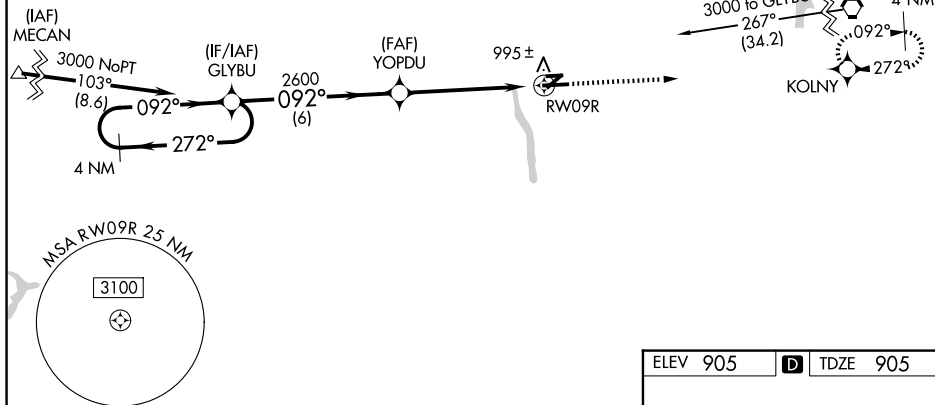

CATEGORY	A	B	C	D
LPV DA	1105-½ 200 (200-½)			
LNAV/VNAV DA	1192-½ 287 (300-½)			
LNAV MDA	1420-½ 515 (600-½)		1420-1 515 (600-1)	
CIRCLING	1420-1 515 (600-1)		1420-1½ 515 (600-1½)	1680-2½ 775 (800-2½)

