

WAAS CH 78208 W35A	APP CRS 354°	Rwy Idg 5001 TDZE 880 Apt Elev 901
--	------------------------	---



RNAV (GPS) RWY 35
TRI-CITY (PPF)

RNP APCH.

T Procedure NA at night. Rwy 35 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct CEBIX and hold.

ASOS 118,175	KANSAS CITY CENTER 128.6 282,325	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

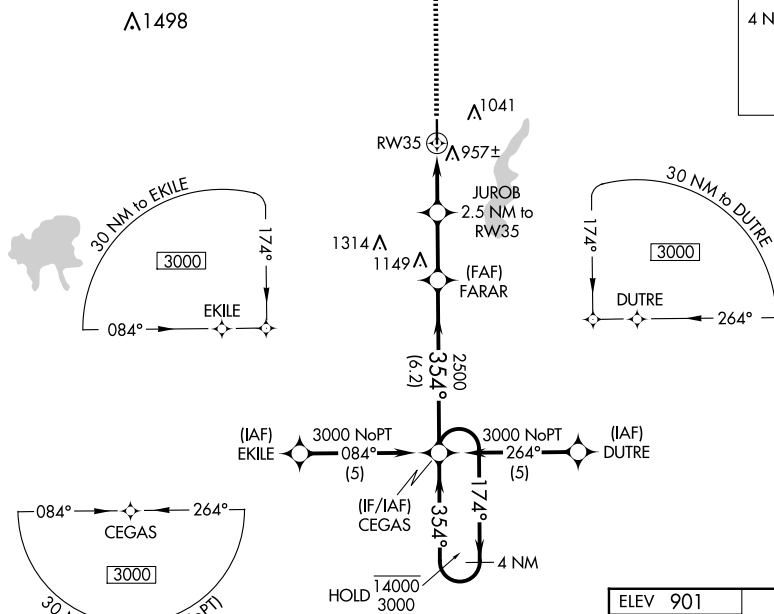

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00/TCH 39).

4 NM Holding Pattern

CEGAS

FARAR

JUOB 2.5 NM to RW35

2500

1700*

354°

174°

354°

14000

3000

GP 3.04°

TCH 45

CATEGORY	A	B	C	D
LPV DA	1130-1	250 (300-1)		NA
RNAV/ VNAV DA	1174-1	294 (300-1)		NA
RNAV MDA	1300-1	420 (400-1)	1300-1 ¼ 420 (400-1 ¼)	NA
CIRCLING	1420-1 519 (600-1)	1440-1 539 (600-1)	1440-1 ½ 539 (600-1 ½)	NA

