

APP CRS	Rwy Ldg	3800
180°	TDZE	437
	Apt Elev	437

RNAV (GPS) RWY 18

ST CHARLES COUNTY RGNL/SMARTT FLD (S'E'T)


▼

▲

DME/DME RNP-0.3 NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 60 feet; increase visibility Cat C ¼ SM. VDP NA with St Louis Lambert Intl altimeter setting.

MISSED APPROACH: Climbing left turn to 2700 direct FASHE and hold.

ASOS 118.075	ST. LOUIS APP CON 124.2 353.9	CLNC DEL 121.6	UNICOM 122.7 (CTAF) 0
-----------------	----------------------------------	-------------------	--------------------------

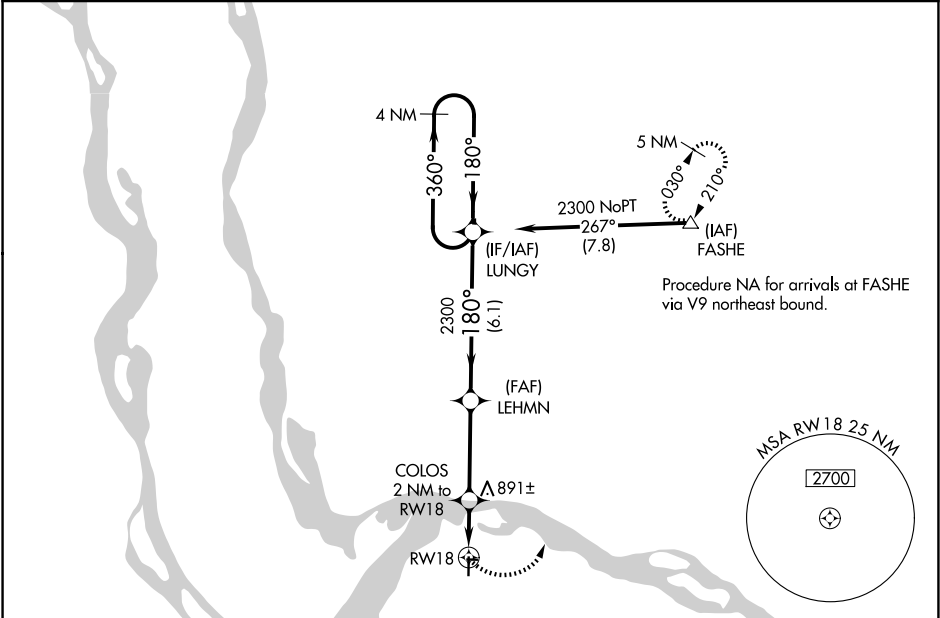

ELEV 437

TDZE 437

2700 FASHE

△

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).

COLOS 2 NM to RWY 18

LEHMN

LUNGY

4 NM Holding Pattern

360° → 2300

← 180°

180°

1260

1.1 NM to RWY 18

≤ 3.69° TCH 43

1.1 NM

0.9 NM

3.6 NM

6.1 NM

CATEGORY	A	B	C	D
RNAV MDA	840-1	403 (500-1)	840-1¼ 403 (500-1¼)	NA
CIRCLING	840-1 403 (500-1)	900-1 463 (500-1)	1220-2¼ 783 (800-2¼)	NA

REIL Rwy 18 0

MIRL Rwy 9-27 and 18-36 0