

WAAS CH 40403 W36A	APP CRS 359°	Rwy Ldg 4002 TDZE 682 Apt Elev 691
--	------------------------	---

RNAV (GPS) RWY 36

LITCHFIELD MUNI (3LF')

RNP APCH - GPS.


▼

⚠

Baro-VNAV and VDP NA when using Taylorville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taylorville altimeter setting and increase LPV DA to 1005 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 1145 and all visibilities ¼ SM; increase all MDAs 80 feet and increase LNAV Cat C visibility ½ SM.

MISSED APPROACH: Climb to 3000 direct KUYLE and hold.

AWOS-3PT 118.175	ST. LOUIS APP CON 124.2 353.9	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

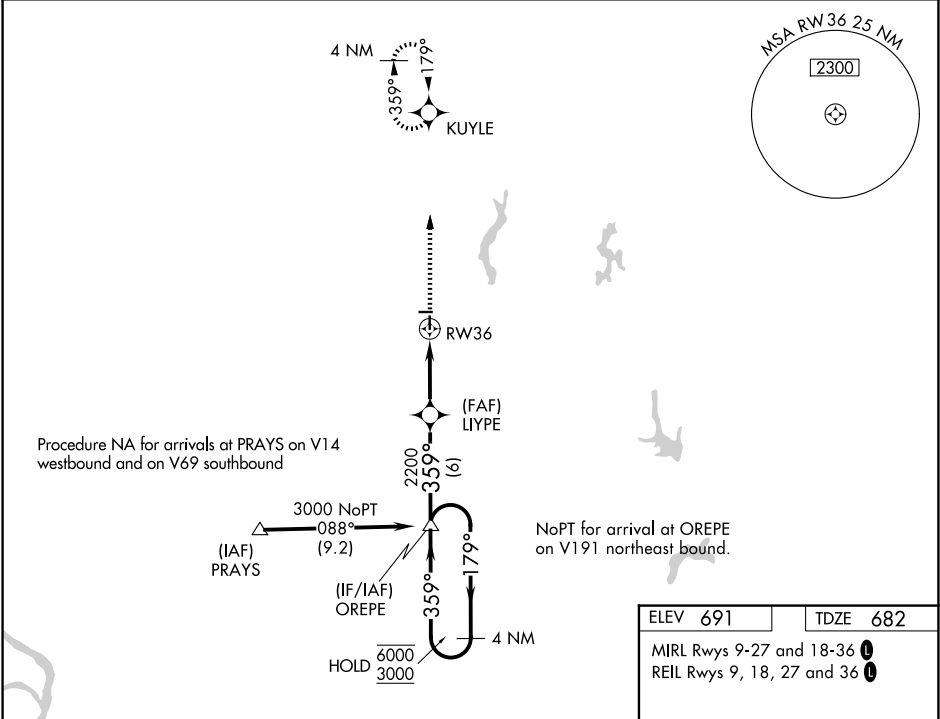

ELEV 691	TDZE 682
MIRL Rwy 9-27 and 18-36 1	
REIL Rwy 9, 18, 27 and 36 1	

4 NM Holding Pattern				
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).				
6000 3000 GP 3.00° TCH 40 OREPE LIYPE 2200 1.4 NM to RWY 36 6 NM 3.3 NM 1.4 NM 3000 KUYLE				
CATEGORY	A	B	C	D
LPV DA	932-3¼ 250 (300-¾)			NA
LNAV/VNAV DA	1072-1½ 390 (400-1½)			NA
LNAV MDA	1140-1 458 (500-1)		1140-1¾ 458 (500-1¾)	NA

