

WAAS CH 77905 W23A	APP CRS 234°	Rwy Ldg 7300 TDZE 7143 Apt Elev 7143
--	------------------------	---

RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FLD (EVW)

RNP APCH - GPS.

T For inoperative MALS/R, increase LPV all Cats visibility to 1, LNAV/VNAV Cat D to 1 and LNAV Cat D to 1¼. When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C or above 34°C.


MAISR




MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF) 0
----------------------	--	----------------------	--

Procedure NA for arrivals at FBR VOR/DME via airway radials 213 CW 285.

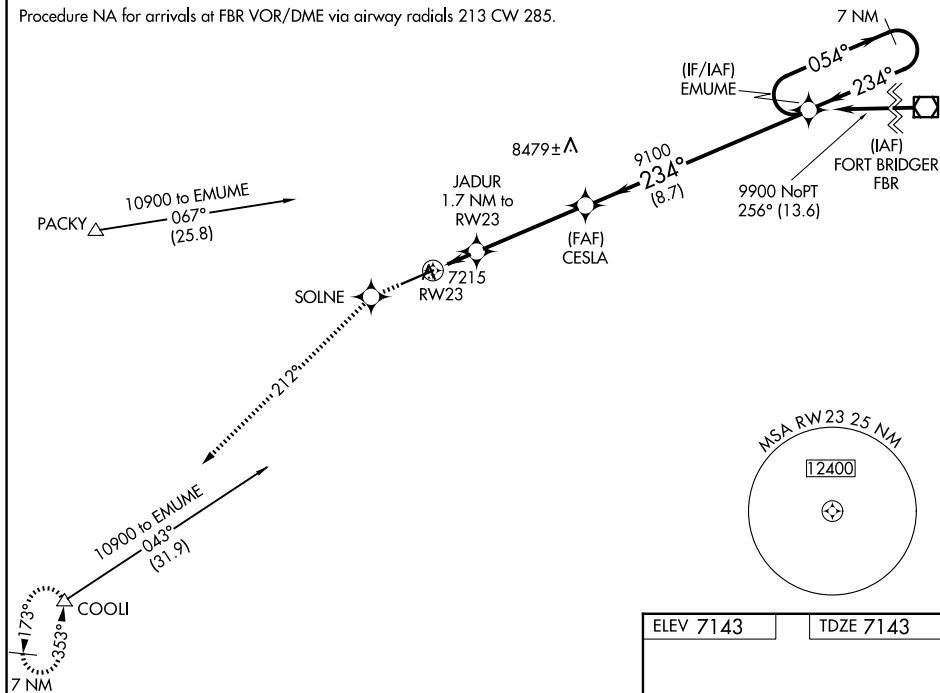

12000 ↑	SOLNE 	212° tr	COOLI 	CESLA	EMUME	7 NM Holding Pattern
*LNAV only	JADUR 1.7 NM to RW23	*1.1 NM to RW23	RW23	7700*	9100	GP 3.00° TCH 47
CATEGORY	A	B	C	D		
LPV DA	7393-½ 250 (300-½)					
LNAV/ VNAV	DA	7443-½ 300 (300-½)	7443-¾ 300 (300-¾)			
LNAV MDA	7520-½ 377 (400-½)	7520-1 377 (400-1)				
CIRCLING	7680-1 537 (600-1)	7760-1 617 (700-1)	7800-1¾ 657 (700-1¾)	8000-2¾ 857 (900-2¾)		

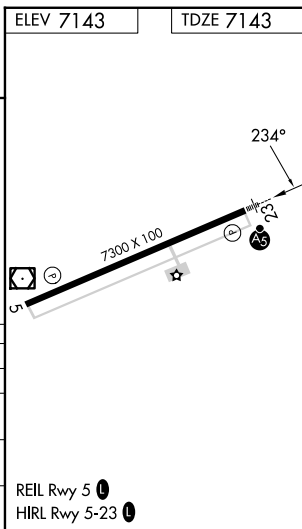

RNAV (GPS) RWY 23