

WAAS CH 45516 W18A	APP CRS 182°	Rwy Ldg TDZE Apt Elev 3700 72 74
--	------------------------	--

RNAV (GPS) RWY 18

HOLK FLD AT FOLEY MUNI (5R4)


▼

▲ NA


Baro-VNAV NA. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. Use Fairhope altimeter setting. When not received, use Gulf Shores altimeter setting and increase LPV DA to 397 feet, LNAV/VNAV DA to 547 feet, and all MDA 20 feet; increase LNAV Cat C visibility ½ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct WIBIK and hold, continue climb-in-hold to 3000.

CQF AWOS-3PT 118.425	PENSACOLA APP CON 118.6 380.6	UNICOM 123.05 (CTAF) 0
--------------------------------	---	----------------------------------

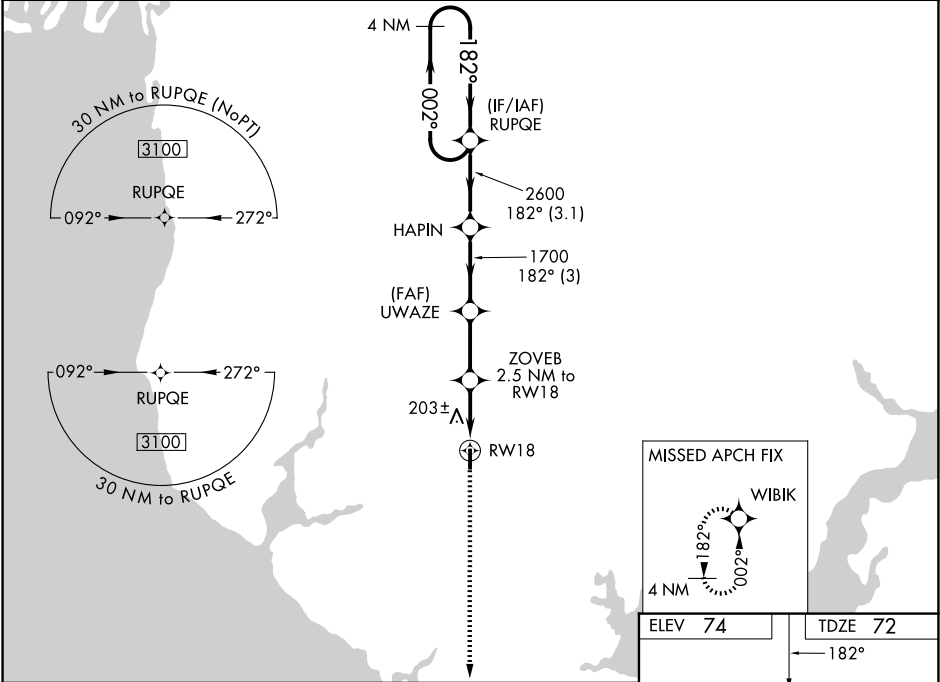

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).		3000	WIBIK
3100 ← 002°		RUPQE		↑	✱
GP 3.00°		HAPIN		*LNAV only	
TCH 54		UWAZE		✱	
← 182° →		ZOVEB		✱ 900	
2600		2.5 NM to RW18		RW18	
1700		2.5 NM		3700 X 74	
← 3.1 NM →		← 3 NM →		81	
CATEGORY		A		B	
LPV DA		393-1		321 (400-1)	
LNAV/ VNAV DA		543-1½		471 (500-1½)	
LNAV MDA		480-1		408 (500-1)	
CIRCLING		680-1		606 (700-1)	

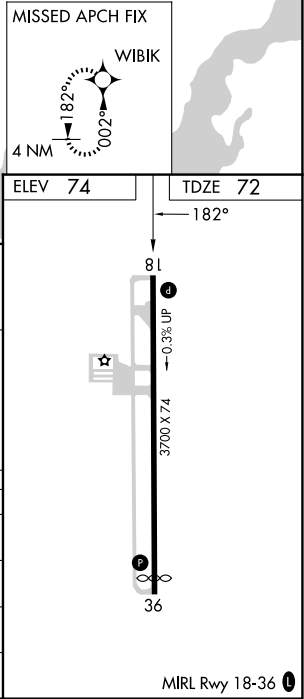

SE-4, 06 AUG 2026 to 03 SEP 2026

SE-4, 06 AUG 2026 to 03 SEP 2026