


LOC/DME I-URD	APP CRS	Rwy Ldg	7002
110.5	224°	TDZE	12
Chan 42		Apt Elev	21

ILS or LOC RWY 22

LAGUARDIA (LGA)

RADAR required for procedure entry. RADAR or DME required for LOC only.		ALSF-1	MISSED APPROACH: Climb to 3000 on LGA VOR/DME R-225 to PROUD INT/LGA 11 DME and hold, continue climb-in-hold to 3000.
Circling NA northwest of Rwy 4 and southwest of Rwy 13.		A1	

D-ATIS 125.95	NEW YORK APP CON 120.8 322.35	LAGUARDIA TOWER 118.7 322.35	GND CON 121.7 322.35
------------------	----------------------------------	---------------------------------	-------------------------

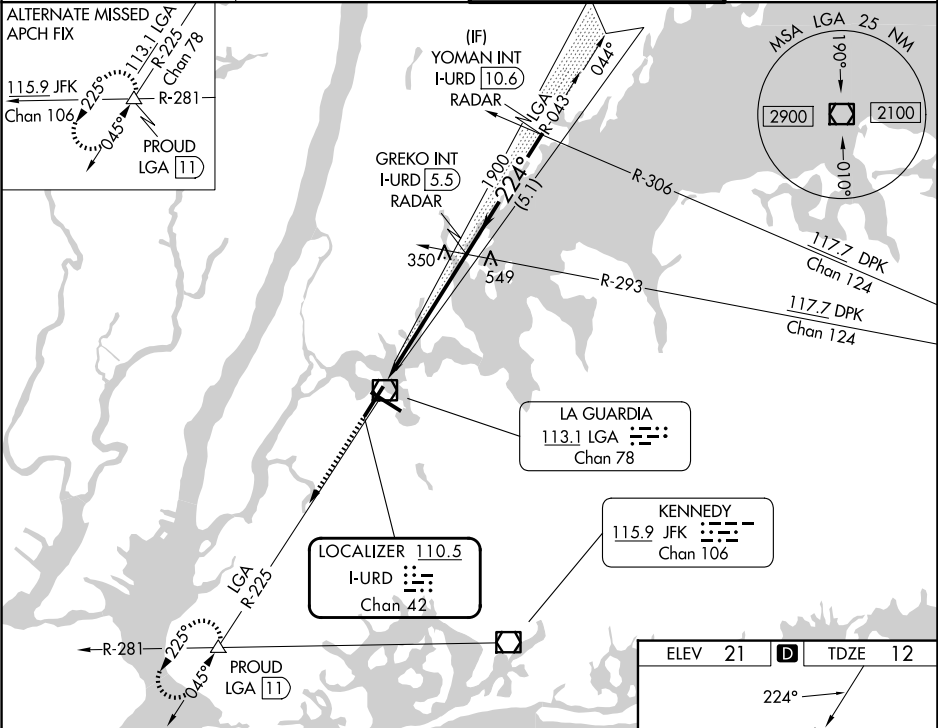

3000	PROUD	VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 67).		YOMAN INT I-URD 10.6 RADAR
LGA R-225	△			
I-URD DME ANTENNA	I-URD 0.2	I-URD 1.5	1900	3000
1.6 NM	4.1 NM	5.1 NM		GS 3.00° TCH 52
CATEGORY	A	B	C	D
S-ILS 22	212/18		200 (200-1/2)	
S-LOC 22	600/24 588 (600-1/2)		600-1 1/4 588 (600-1 1/4)	
CIRCLING	700-1 679 (700-1)		1080-3 1239 (1300-3)	

