


PIGGN THREE DEPARTURE (RNAV)
(PIGGN3.PIGGN) 24MAR22
SANTA ANA, CALIFORNIA
JOHN WAYNE/ORANGE COUNTY (SNA)

**TOP ALTITUDE:
13000**

NOTE: RADAR required.
NOTE: RNAV-1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet and turboprop only.
NOTE: Parachute jumping all hours, 14000' and below,
north of route between PIGGN and FNCHH.
NOTE: Aircraft may be RADAR vectored to DANAH or PIGGN.

TAKEOFF MINIMUMS

Rwy 2L: Standard with minimum climb of 500 feet
per NM to 1300.
Rwy 20R: Standard.

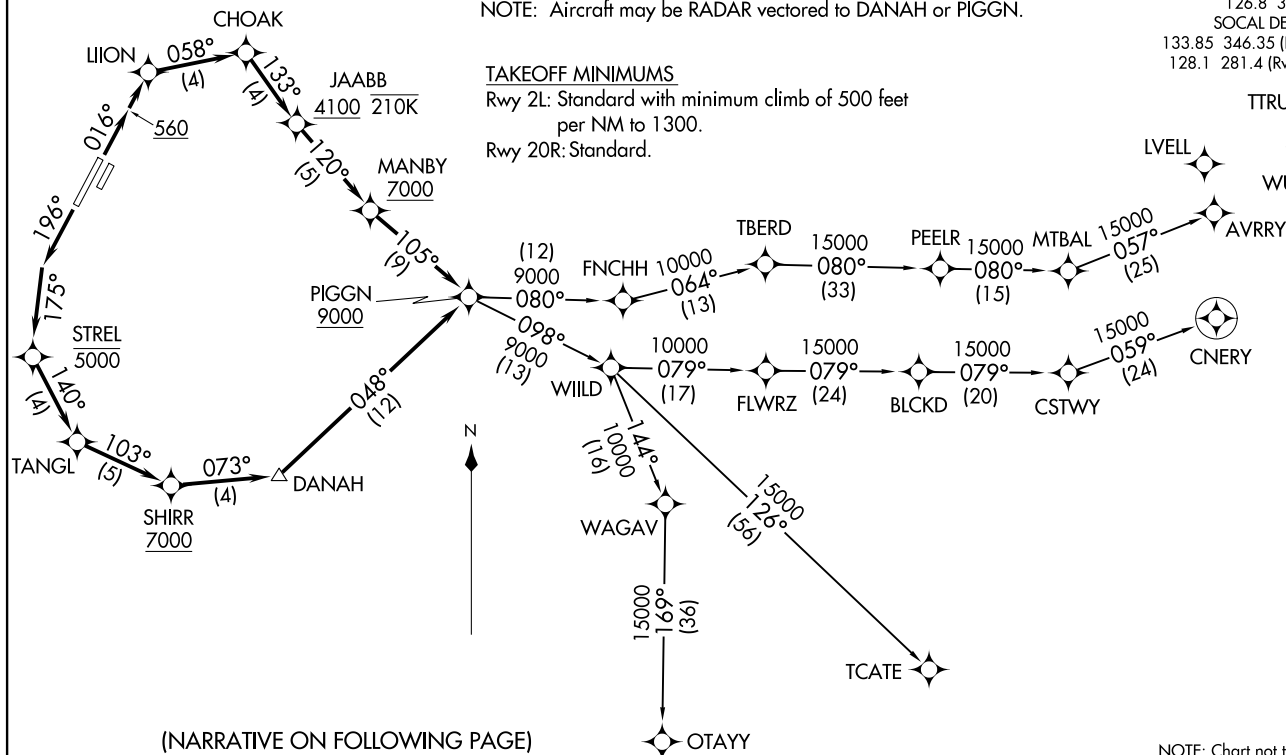

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

D-ATIS 126.0
CLNC DEL 118.0
CPDLC
GND CON 120.8
JOHN WAYNE TOWER * 126.8 343.625
SOCAL DEP CON 133.85 346.35 (Rwy 2L)
128.1 281.4 (Rwy 20R)

TTRUE
WURMO

(PIGGN3.PIGGN) 22251
PIGGN THREE DEPARTURE (RNAV)
AL-377 (FAA)
JOHN WAYNE/ORANGE COUNTY (SNA)
SANTA ANA, CALIFORNIA



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2L: Climb on heading 016° to 560, then direct LIION, then on track 058° to CHOAK, then on track 133° to cross JAABB at or above 4100 and at or below 210K, then on track 120° to cross MANBY at or above 7000, then on track 105° to cross PIGGN at or above 9000, thence. . . .

TAKEOFF RUNWAY 20R: Climb on heading 196° to intercept course 175° to cross STREL at or below 5000, then on track 140° to TANGL, then on track 103° to cross SHIRR at or above 7000, then on track 073° to DANAH, then on track 048° to cross PIGGN at or above 9000, thence. . . .

. . . . on (transition) maintain 13000. Expect filed altitude 10 minutes after departure.

AVRRY TRANSITION (PIGGN3.AVRRY)

CNERY TRANSITION (PIGGN3.CNERY)

OTAYY TRANSITION (PIGGN3.OTAYY)

TCATE TRANSITION (PIGGN3.TCATE)