

LOC	I-BON	APP CRS	Rwy Ldg	8000
	111.5	050°	TDZE	1498
			Apt Elev	1519

ILS or LOC RWY 5



TRI-CITIES (TRI)

ADF required. RADAR required for procedure entry.

Circling to Rwy 9 NA at night. Circling NA northwest of Rwys 9 and 23. Autopilot coupled approach NA below 2200. Procedure NA when control tower closed.

MISSED APPROACH: Climb to 2000 then climb to 4800 direct MOCCA LOM INT and hold, continue climb-in-hold to 4800.

ATIS	TRI-CITY APP CON ★	TRI-CITY TOWER ★	GND CON	UNICOM
118.25	134.425 349.0	119.5 (CTAF) 257.8	121.7 348.6	122.95

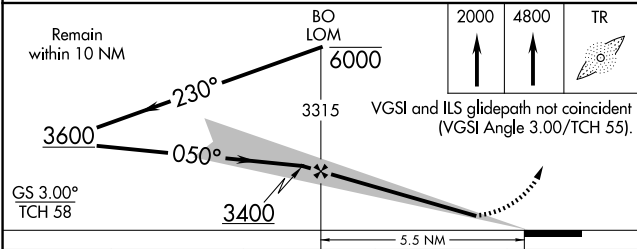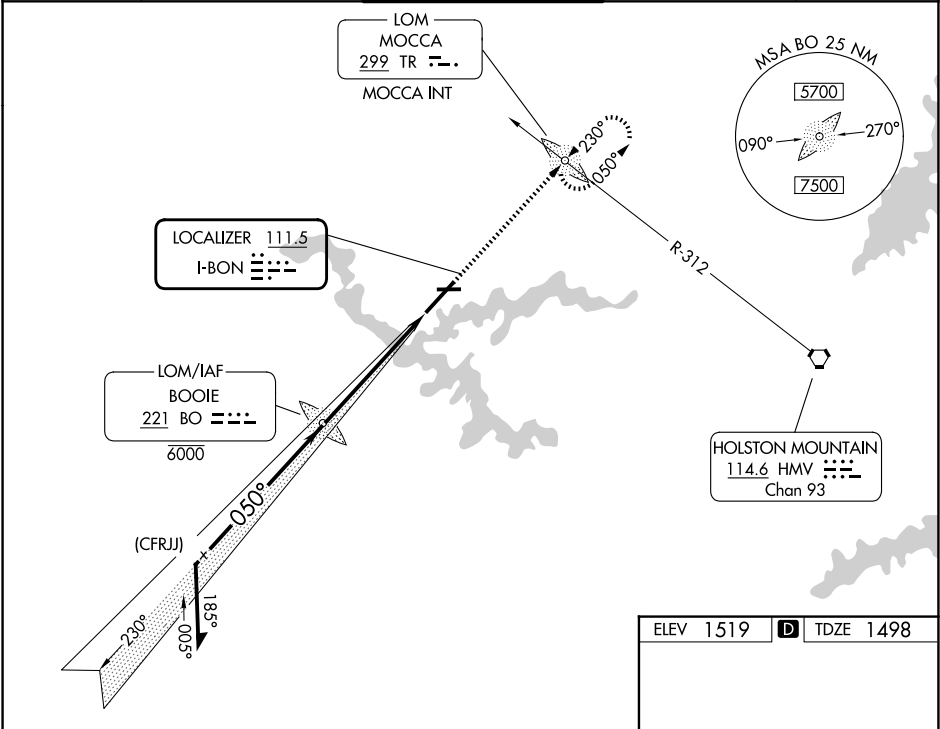

CATEGORY	A	B	C	D
S-ILS 5	1698/40 200 (200-¾)			
S-LOC 5	2100/55	602 (600-1)	2100-1¾	602 (600-1¾)
CIRCLING	2120-1 601 (700-1)	2180-1 661 (700-1)	2320-2¼ 801 (900-2¼)	2500-3 981 (1000-3)

ELEV 1519 **D** TDZE 1498

REIL Rws 5 and 27
TDZL/RCLS Rwy 23
HIRL Rwy 5-23
MIRL Rwy 9-27

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50