

VORTAC SPI <u>112.7</u> Chan 74	APP CRS 055°	Rwy Ldg TDZE Apt Elev	7927 592 598
---	------------------------	-----------------------------	---

VOR RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

DME required.


T VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 60 feet and Circling Cat C/D visibility $\frac{1}{4}$ SM. For inop ALS, increase S-4 Cat C/D visibility to RVR 5500.

MALSR



MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 325° and on SPI VORTAC R-355 to GROWL/14.7 DME and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	-------------------------------------	---	------------------------	------------------

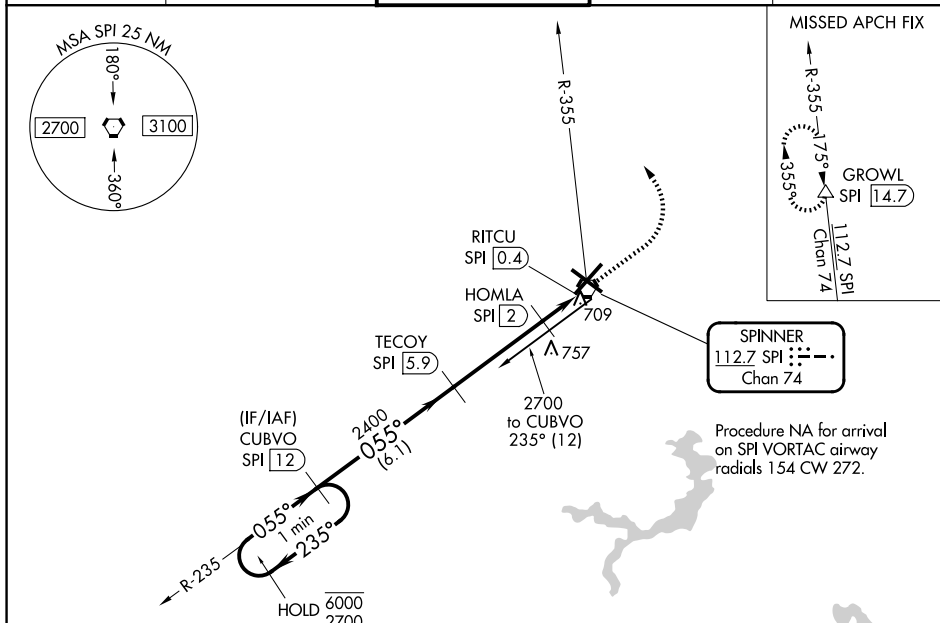

EC-3, 03 SEP 2026 to 01 OCT 2026

One Minute Holding Pattern

CUBVO SPI 12

TECOY SPI 5.9

HOMLA SPI 2

RITCU SPI 0.4

1500

2500

SPI R-355

GROWL

6000 ← 235°

2700 ← 055°

055°

2400

3.00° TCH 56

1140

6.1 NM

4 NM

0.6

1 NM

CATEGORY	A	B	C	D
S-4	960/24	368 (400-½)	960/40	368 (400-¾)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

REIL Rwy 13

HIRL Rws 4-22 and 13-31

SPRINGFIELD, ILLINOIS

Amdt 1 02OCT25

ABRAHAM LINCOLN CAPITAL (SPI)

VOR RWY 4

39°51'N-89°41'W

EC-3, 03 SEP 2026 to 01 OCT 2026