

WAAS CH 40228 W16A	APP CRS 162°	Rwy Ldg TDZE Apt Elev 7000 4202 4252
--	------------------------	--


RNAV (GPS) RWY 16
WORLAND MUNI (WRL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -32°C (-25°F) or above 17°C (62°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Greybull altimeter setting. When local altimeter setting not received, use Greybull altimeter setting: increase LPV DA to 4574 feet, LNAV/VNAV DA to 4616 feet, and all MDA's 140 feet; increase LPV, LNAV/VNAV and LNAV all Cats, and Circling Cat C/D visibilities ½ SM. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 9600 direct WAPSU and on track 207° to ZURNA and hold, continue climb-in-hold to 9600.

ASOS 135.475	SALT LAKE CENTER 133.25 285.6	UNICOM 123.05 (CTAF) 0
------------------------	---	----------------------------------

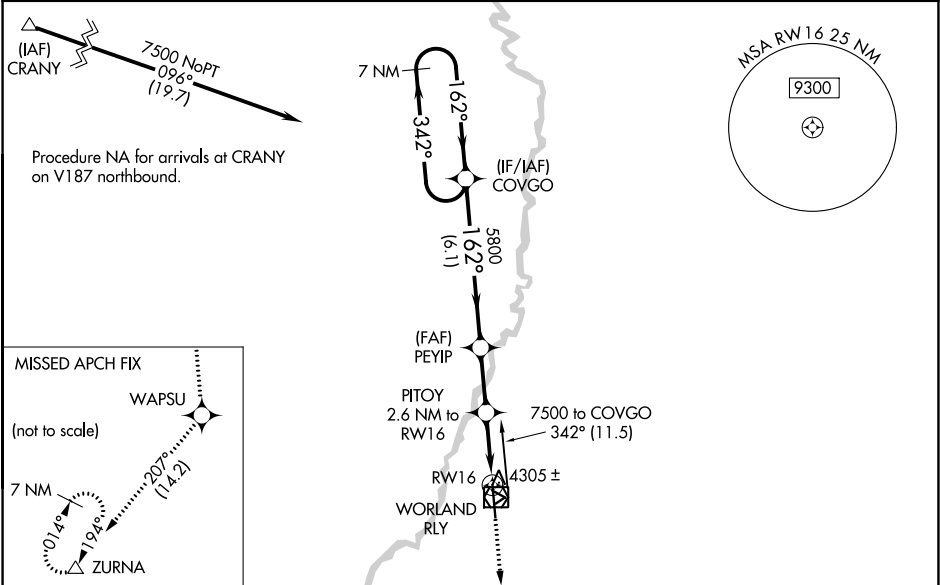

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).

7 NM Holding Pattern COVGO

7500 ← 342° / 162° →

GP 3.00° TCH 55

PEYIP 5800

PITOI 2.6 NM to RW16

*1.1 NM to RW16

*5040

6.1 NM, 2.3 NM, 1.5 NM, 1.1 NM

CATEGORY	A	B	C	D
LPV DA	4452-¾ 250 (200-¾)			
LNAV/VNAV DA	4494-⅞ 292 (300-⅞)			
LNAV MDA	4560-1 358 (400-1)	4560-1½ 358 (400-1½)		
CIRCLING	4920-1 668 (700-1)	4920-1¾ 668 (700-1¾)	5020-2½ 768 (800-2½)	

ELEV 4252 D TDZE 4202

9600 WAPSU tr 207° ZURNA

*LNAV only

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026