

LOC/DME FCH 111.5 Chan 52	APP CRS 004°	Rwy Ldg 5001 TDZE 343 Apt Elev 343
---	------------------------	---

ILS or LOC RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

DME required.




VDP NA when using LFK altimeter setting. Autopilot coupled approach NA below 740. When local altimeter setting not received, use LFK altimeter setting: Increase S-ILS 36 DA to 598 feet; increase all MDAs 60 feet and S-LOC 36 visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM. Localizer unusable inside 0.3 NM from threshold.




MISSED APPROACH: Climb to 1000 then climbing right turn to 2400 direct LFK VORTAC and hold.

AWOS-3PT
135.625

HOUSTON CENTER
125.175 285.575

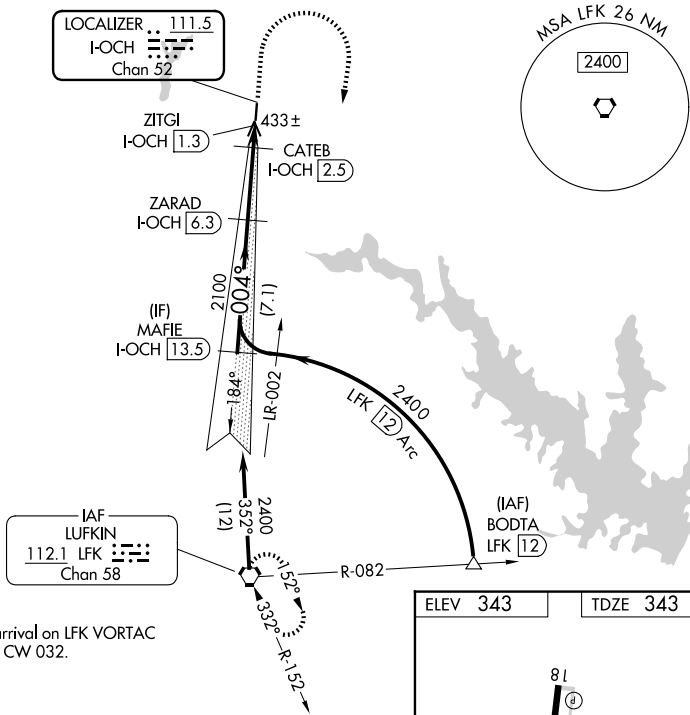UNICOM
123.0 (CTAF) 

Procedure NA for arrival on LFK VORTAC
airway radials 318 CW 032.

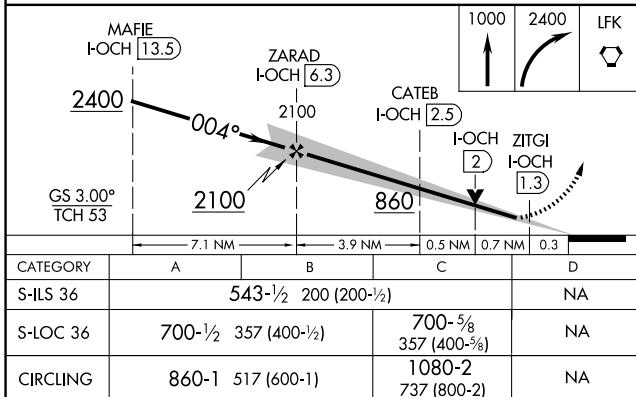

CATEGORY	A	B	C	D
S-ILS 36	543-½ 200 (200-½)			NA
S-LOC 36	700-½ 357 (400-½)	700-⅝ 357 (400-⅝)		NA
CIRCLING	860-1 517 (600-1)	1080-2 737 (800-2)		NA

