



WAAS CH 53416 W12A	APP CRS 121°	Rwy Idg TDZE Apt Elev	5001 91 99
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 12
BREWTON MUNI(12J)

RNP APCH. ▼ ▲ NA Baro-VNAV NA when using Pensacola altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. When local altimeter setting not received, use Pensacola altimeter setting; increase LPV DA to 425 feet; increase LNAV/VNAV DA to 563 feet; increase all MDAs 100 feet and LPV visibility all Cats, LNAV/VNAV visibility all Cats and LNAV Cats C and D ¼ SM. VDP NA when using Pensacola altimeter setting.		MISSED APPROACH: Climb to 2000 direct MIEGE and right turn on track 211° to HOLBI and on track 289° to ODAZO and hold.
AWOS-3PT 119.325	PENSACOLA APP CON 127.35 291.625	UNICOM 122.725 (CTAF) ①

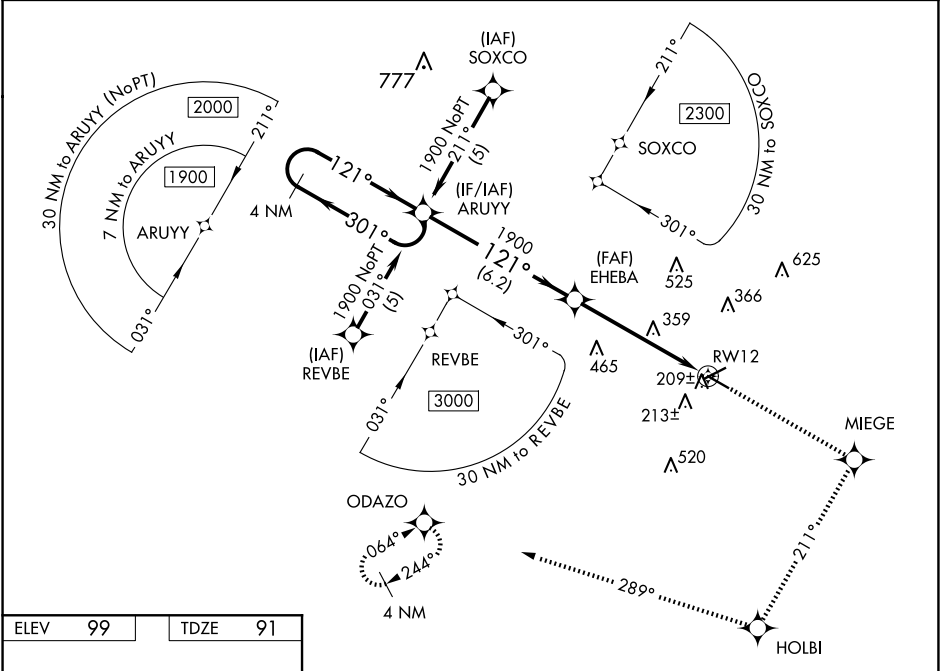

ELEV 99	TDZE 91
---------	---------

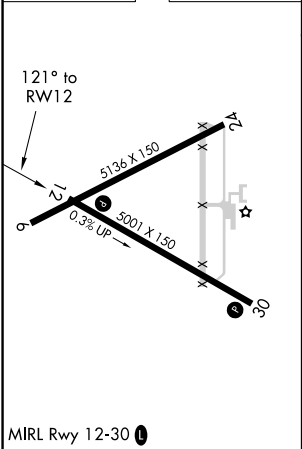

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 48).		2000 ↑	MIEGE ✧	tr 211° 	HOLBI ✧	tr 289° 	ODAZO ✧
4 NM Holding Pattern ARUYU		EHEBA				*LNAV only.	
1900 ← 301° 121° →		121° →		*1.6 NM to RW12 RW12			
GP 3.00° TCH 46		1900 ↗					
		6.2 NM		3.9 NM		1.6 NM	
CATEGORY		A		B		C	
LPV DA				341-1 250 (300-1)			
LNAV/VNAV DA				479-1½ 388 (400-1½)			
LNAV MDA		640-1 549 (600-1)		640-1½ 549 (600-1½)			

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026