

WAAS CH 97635 W05A	APP CRS 049°	Rwy Ldg TDZE 40 Apt Elev 40
--	------------------------	---

RNAV (GPS) RWY 5

GEORGETOWN COUNTY (GGE)

RNP APCH.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 5 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LNAV/VNAV visibility Cats A/B to ¾ SM. Inop table does not apply to LPV all Cats. Circling Rwy 11, 29 NA at night.

ODALS

MISSED APPROACH:
Climb to 2000 direct
OTVOE and hold.

AWOS-3 118.275	MYRTLE BEACH APP CON ★ 127.4 257.95	GCO 121.725	UNICOM 123.0 (CTAF)
--------------------------	---	-----------------------	-------------------------------

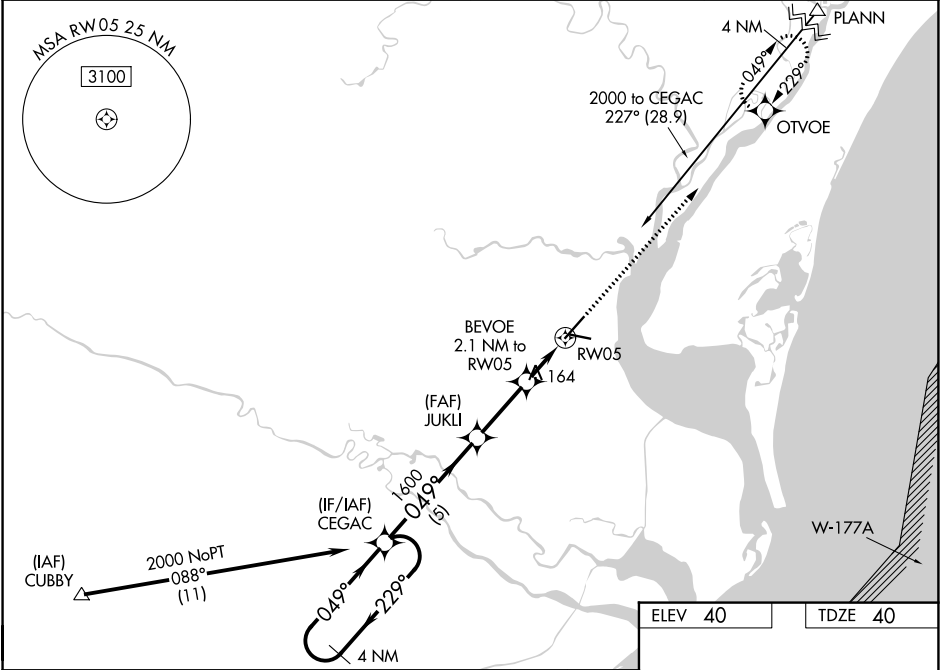

4 NM Holding Pattern

CEGAC

2000 ← 229°

049° →

GP 3.00°

TCH 41

1600

JUKLI

1600

BEVOE

2.1 NM to RW05

*1.3 NM to RW05

RW05

*740

5 NM

2.7 NM

0.8

1.3

2000

OTVOE

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	290-¾ 250 (300-¾)			
LNAV/VNAV DA	304-¾ 264 (300-¾)			
LNAV MDA	480-¾ 440 (500-¾)		480-1⅛ 440 (500-1⅛)	
CIRCLING	500-1 460 (500-1)	520-1 480 (500-1)	740-2 700 (700-2)	740-2¼ 700 (700-2¼)

