



APP CRS	Rwy Ldg	12000
353°	TDZE	5354
	Apt Elev	5434

RNAV (RNP) Z RWY 34R

DENVER INTL (DEN)

RNP AR APCH - GPS. Authorization required. From MCMUL or KUGLN: RF.	ALSF-2	MISSED APPROACH: Climb to 10000 on track 353° to PIPSY and on track 315° to NIWOT and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -26°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.20 all Cats visibility to 1¾ SM and RNP 0.30 all Cats visibility to 1¾ SM.		

D-ATIS 125.6 379.9	DENVER APP CON 119.3 307.3 (N) 120.35 379.3 (S)	DENVER TOWER 135.3 351.95	GND CON 121.35 379.175 (W) 121.85 377.1 (E)
-----------------------	---	------------------------------	---

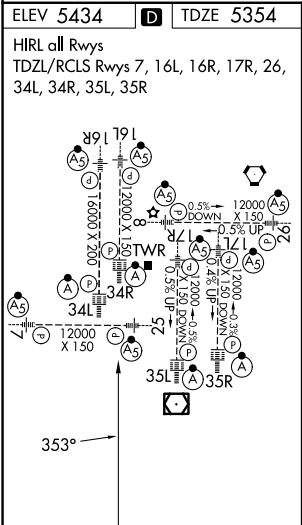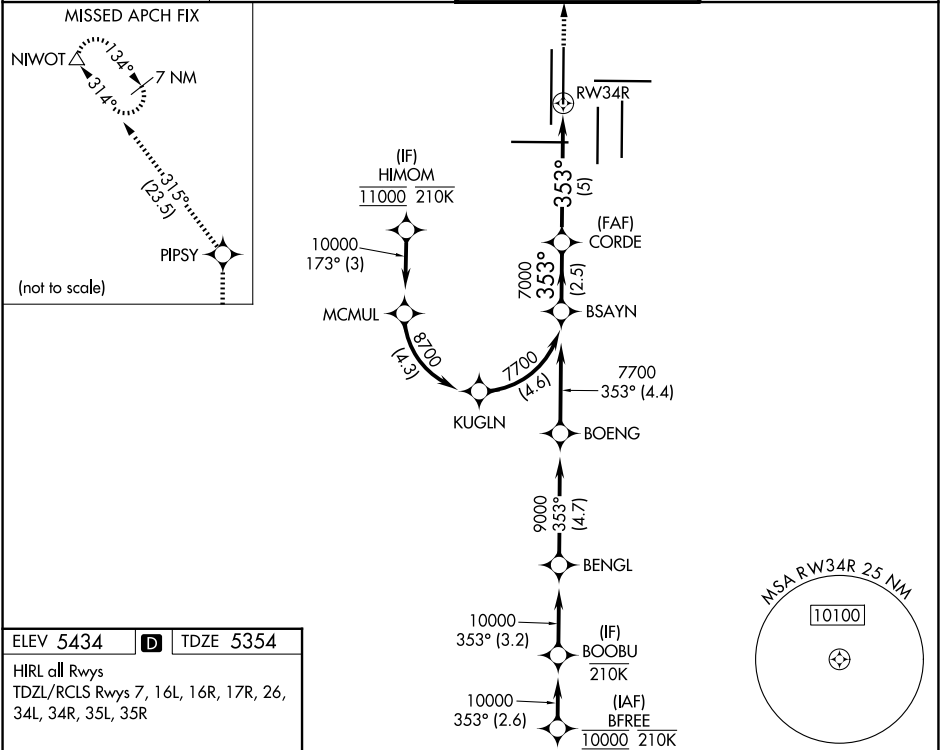

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 63).			
BSAYN	CORDE	PIPSY	NIWOT
7700	7000	10000	10000
GP 3.00°	TCH 55	tr 353°	tr 315°
See planview for multiple IF locations.			
2.5 NM 5 NM			
CATEGORY	A	B	C
RNP 0.10 DA	5743/35	389 (400-½%)	
RNP 0.20 DA	5850/50	496 (500-1)	
RNP 0.30 DA	5980-1¾	626 (600-1¾)	
AUTHORIZATION REQUIRED			