

WAAS CH 58221 W35A	APP CRS 348°	Rwy Ldg TDZE 5022 Apt Elev 5022
--	------------------------	---


RNAV (GPS) RWY 35
NEPHI MUNI (U14)

RNP APCH - GPS.

⚠ Rwy 35 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV NA. VDP NA when using PVU altimeter setting. When local altimeter setting not received, use PVU altimeter setting: increase LPV DA to 5416 feet and all visibilities 3/8 SM, increase LNAV/VNAV DA to 5756 feet and all visibilities 1/4 SM; increase all MDAs 160 feet.

MISSED APPROACH: (Do not exceed 195K until PILTE) Climb to 8200 then climbing left turn to 10600 direct PILTE and hold.

AWOS-3PT 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) 0
----------------------------	--	-----------------------------------

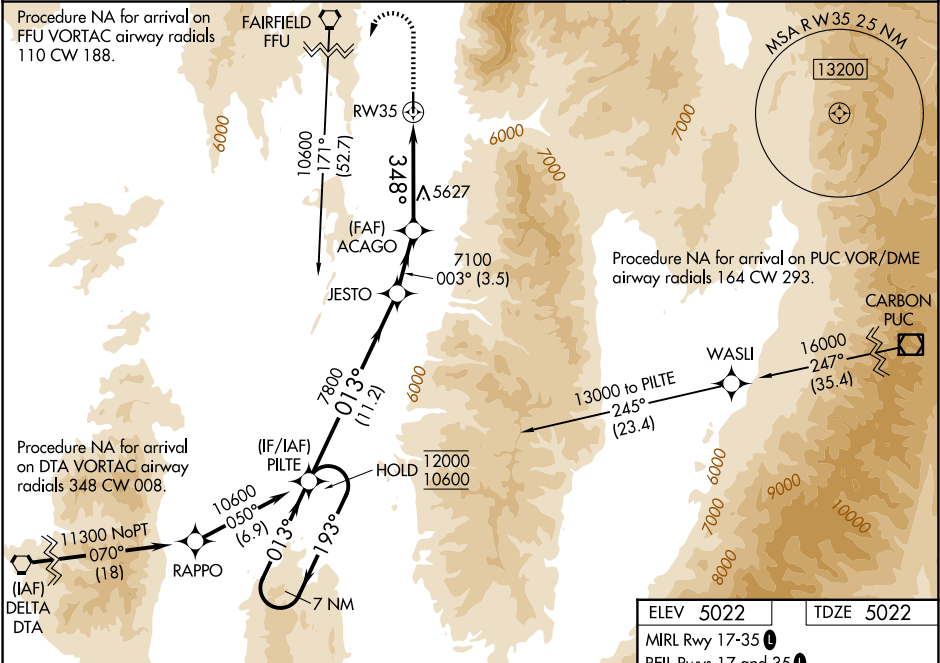

8200

10600

PILTE

↑

↶

✧

JESTO

ACAGO

PILTE

7 NM Holding Pattern

12000

10600

7100

7800

013°

193°

003°

013°

348°

2.9 NM to RW35

2.9 NM

3.5 NM

3.5 NM

11.2 NM

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	5272-3/4 250 (300-3/4)			
LNAV/VNAV DA	5612-13/4 590 (600-13/4)			
LNAV MDA	5980-11/4 958 (1000-11/4)	5980-11/2 958 (1000-11/2)	5980-3 958 (1000-3)	
CIRCLING	5980-11/4 958 (1000-11/4)	5980-11/2 958 (1000-11/2)	NA	

ELEV 5022

TDZE 5022

MIRL Rwy 17-35 0

REIL Rwys 17 and 35 0

0.63 X 100

6300 X 100

35

348°

SW-4, 03 SEP 2026 to 01 OCT 2026

SW-4, 03 SEP 2026 to 01 OCT 2026