


APP CRS	Rwy Ldg	10000
214°	TDZE	5316
	Apt Elev	5355

RNAV (RNP) Z RWY 21


ALBUQUERQUE INTL SUNPORT (ABQ)

ASR	For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 47°C (116°F). RF required. GPS required.	MISSED APPROACH: Climb to 8000 on track 214° to HUMKU, right turn to WAPMA, then on track 315° to ABQ VORTAC and hold.
-----	---	--

D-ATIS	ALBUQUERQUE APP CON	ALBUQUERQUE TOWER	GND CON	CLNC DEL	CPDLC
118.0 257.7	123.9 354.1	120.3 351.9	121.9 348.6	119.2 259.3	

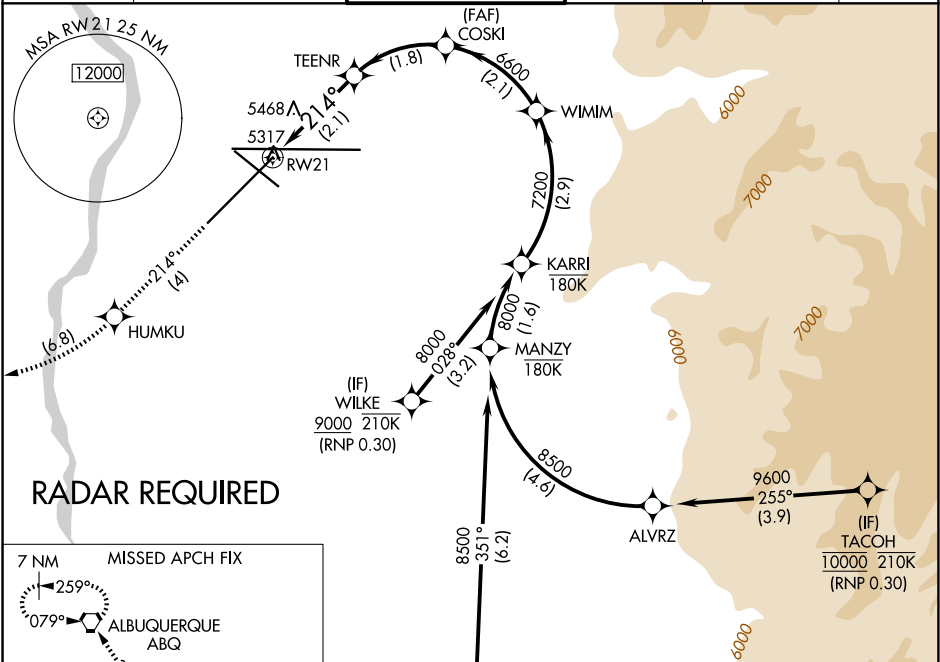

 WAPMA (not to scale)		 RMR0 (IAF) PILLA 10000 210K (RNP 0.30)		
8000 ↑ tr 214°	HUMKU 	WAPMA 	ABQ tr 315° 	See planview for multiple IF locations.
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).		TEENR 6030	COSKI 6600	KARRI
RW21 	 214°		WIMIM 7200	8000
2.1 NM		1.8 NM	2.1 NM	2.9 NM
CATEGORY	A	B	C	D
RNP 0.30 DA	5755-1½		439 (400-1½)	
AUTHORIZATION REQUIRED				

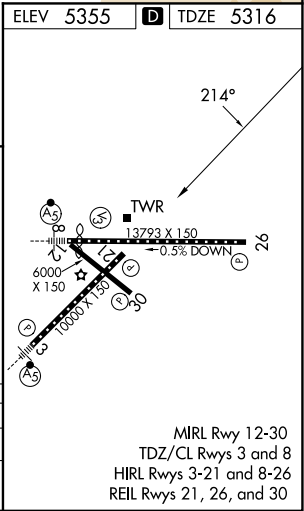

SW-1, 01 OCT 2026 to 29 OCT 2026

SW-1, 01 OCT 2026 to 29 OCT 2026