

WAAS CH 61129 W16A	APP CRS 163°	Rwy Ldg TDZE Apt Elev	7000 570 608
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 16R

SEATTLE PAINE FLD INTL (P.A.E)


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). Circling Rwy 34R NA at night. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: (Do not exceed 240K until ECEPO) Climb to 1100 then climbing right turn to 3000 direct ECEPO and hold, continue climb-in-hold to 3000.

ATIS 128.65	SEATTLE APP CON 128.5 306.9	PAINE TOWER★ 132.95 (CTAF) 0 256.7	GND CON 121.8 339.8	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------------	-------------------------

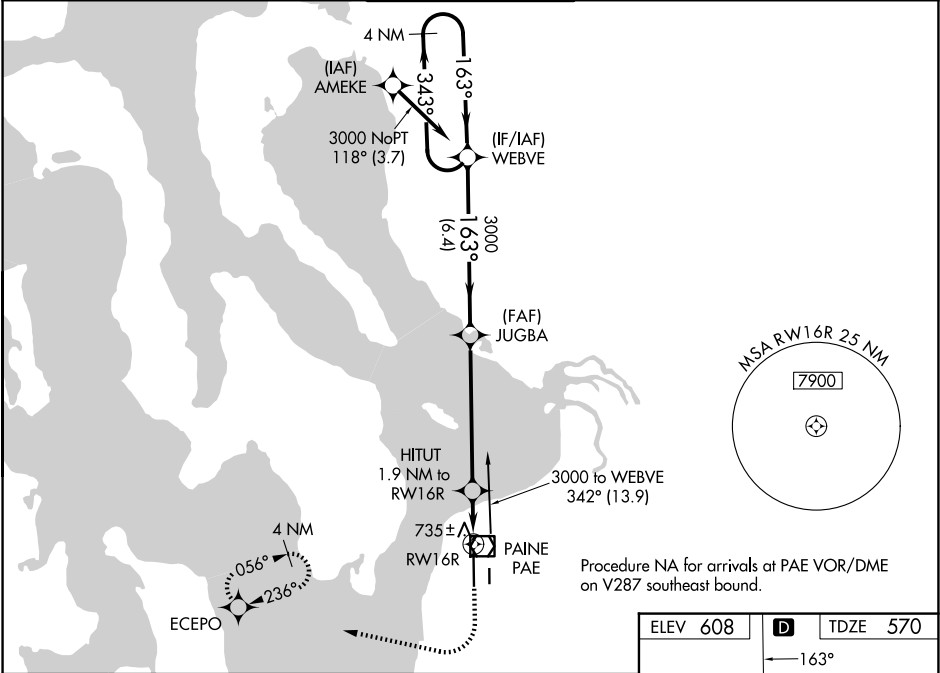

VGSI and RNAV glidepath not coincident		1100	3000	ECEPO
4 NM Holding Pattern		WEBVE	JUGBA	HITUT 1.9 NM to RW16R
3000 ← 343°		163° →	3000	*LNAV only
GP 3.00°		TCH 57	*1220	*1.1 NM to RW16R
6.4 NM		5.6 NM	0.8 NM	1.1 NM
CATEGORY	A	B	C	D
LPV DA	770/18 200 (200-½)			
LNAV/VNAV DA	913/30 343 (400-⅝)			
LNAV MDA	1000/24	430 (400-½)	1000/40	430 (400-¾)
CIRCLING	1100-1	492 (500-1)	1120-1½ 512 (600-1½)	1160-2 552 (600-2)

ELEV 608

D

TDZE 570

163°

89L

TWR

7000 X 1.50

34L

34R

19L

3004 X 7.5

34R

TDZL/RCLS Rwy 16R

HIRL Rwy 16R-34L 0

REIL Rws 16L and 34R

MIRL Rwy 16L-34R