

WAAS CH 49137 W10A	APP CRS 096°	Rwy Ldg 3463 TDZE 1013 Apt Elev 1048
--	------------------------	---



RNAV (GPS) RWY 10

GREENVILLE DOWNTOWN (GMU)


V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or **A** above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ½ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3700 direct JADOT and hold.


ATIS 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
-----------------	----------------------------------	--	-------------------	------------------

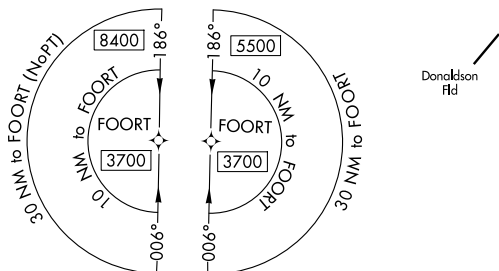Donaldson
Fid

ELEV	1048	D	TDZE	1013
------	------	----------	------	------

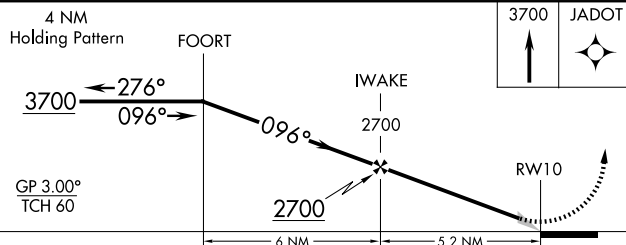

CATEGORY	A	B	C	D
LPV DA	1269-1 256 (300-1)			
LNAV/ VNAV DA	1351-1½ 338 (400-1½)			
LNAV MDA	1580-1 567 (600-1)		1580-1½ 567 (600-1½)	
CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)



REIL Rwy 28
REIL Rwy 19 **L**
MIRL Rwy 10-28
HIRL Rwy 1-19 **L**