

APP CRS	Rwy Ldg	9501
298°	TDZE	3206
	Apt Elev	3206

RNAV (RNP) RWY 30
MISSOULA MONTANA (MSO)

RNP AR APCH. RF required.

 For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 43°C (109°F). When local altimeter setting not received, procedure NA.


MISSED APPROACH: Climb to 11000 on track 297° to SUPPY and on track 292° to HEDVA and on track 297° to LOCIV, then right turn to NEYOC and on track 131° to ARLEE and hold. *Missed approach requires minimum climb of 215 feet per NM to 5000.

ATIS
126.65


SPOKANE APP CON ★
124.9 298.95

MISSOULA TOWER ★
118.4 (CTAF) **L** 377.175

GND CON
121.9

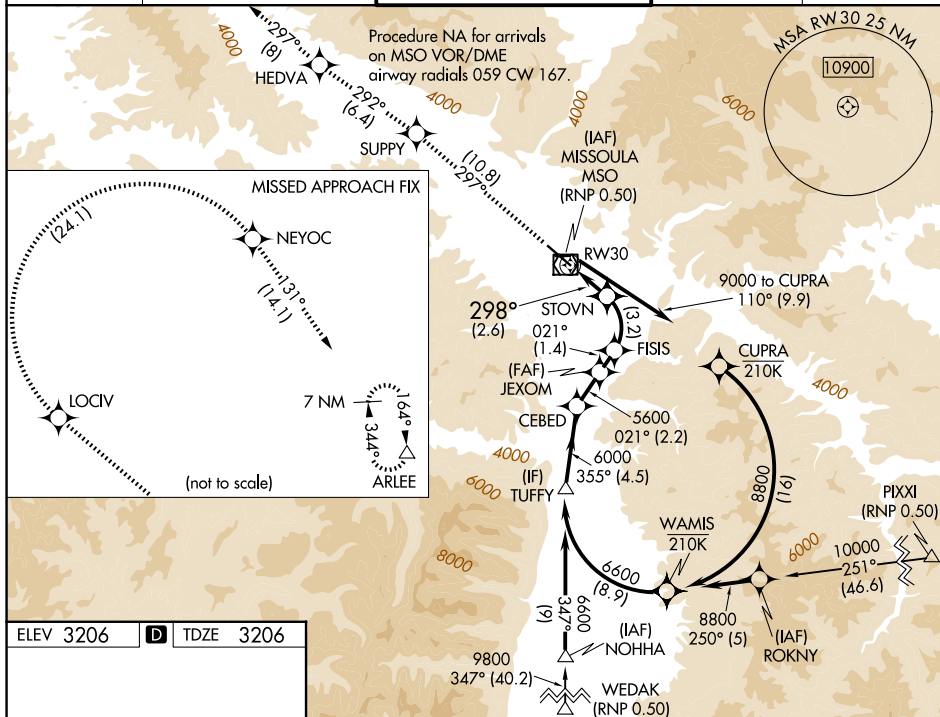UNICOM
122.95

ELEV 3206	D	TDZE 3206
-----------	----------	-----------

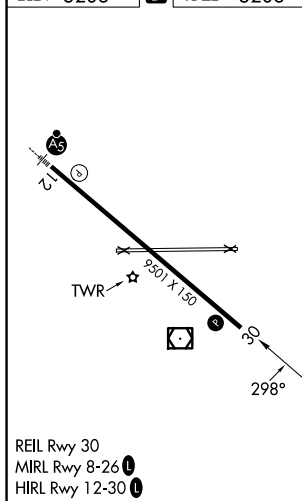

11000 ↑ tr 297°	SUPPLY ↑ tr 292°	HEDVA ↑ tr 292°				
CATEGORY	A	B	C	D		
RNP 0.30 DA *	3524-1 318 (400-1)					
RNP 0.30 DA	3582-1¼ 376 (400-1¼)					
AUTHORIZATION REQUIRED						

MISSOULA, MONTANA
Orig-C 19JUL18

46°55'N-114°05'W

MISSOULA MONTANA (MSO)
RNAV (RNP) RWY 30