

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>65835</b><br><b>W31A</b> | APP CRS<br><b>312°</b> | Rwy Ldg<br>TDZE <b>812</b><br>Apt Elev <b>827</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 31

ROSECRANS MEML (STJ)


⚠

ASR/PAR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Straight-In minimums NA at night. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV visibility 1⁄8 mile and LNAV/VNAV visibility 3⁄8 mile all Cats; increase all MDA 100 feet and LNAV Cat C and D visibility 1⁄4 mile, and Circling Cat C 1⁄2 mile, Cat D 1⁄4 mile.

MISSED APPROACH:  
Climb to 3100 direct OVEGE and hold.

|                       |                                             |                                                |                         |                         |
|-----------------------|---------------------------------------------|------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>125.05</b> | ST. JOSEPH APP CON ★<br><b>120.35 360.8</b> | ST. JOSEPH TOWER ★<br><b>126.9(CTAF) 239.0</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---------------------------------------------|------------------------------------------------|-------------------------|-------------------------|

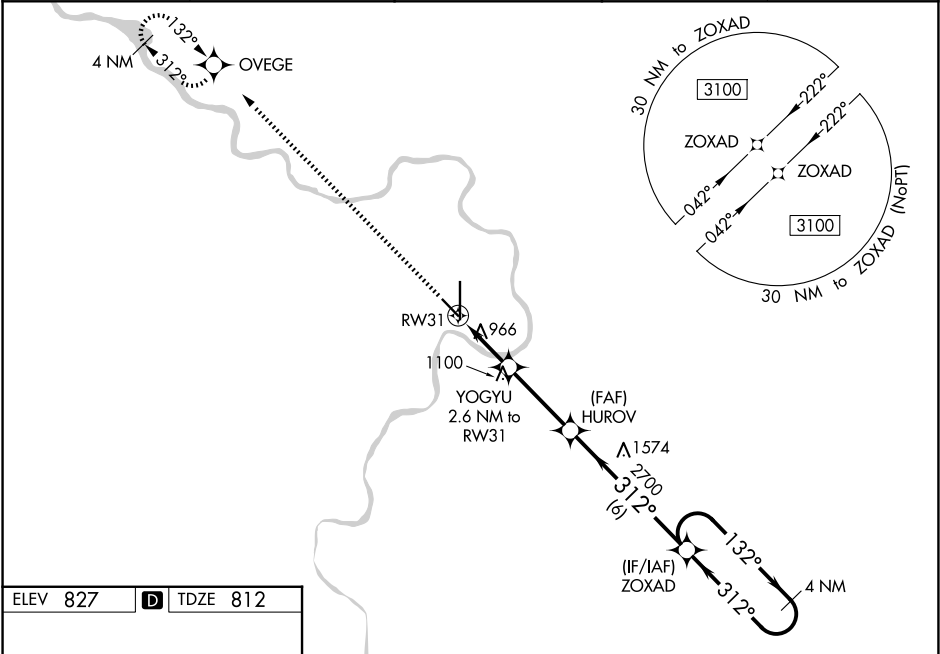

|                 |          |                 |
|-----------------|----------|-----------------|
| ELEV <b>827</b> | <b>D</b> | TDZE <b>812</b> |
|-----------------|----------|-----------------|

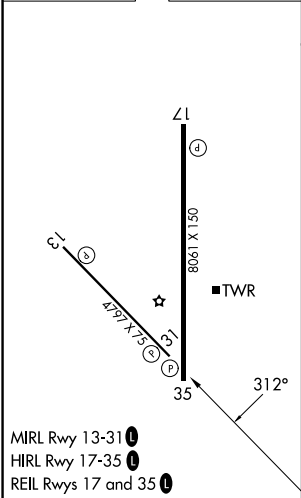

|              |                      |                    |                      |                      |                      |
|--------------|----------------------|--------------------|----------------------|----------------------|----------------------|
|              | OVEGE                | YOGYU              | HUROV                | ZOXAD                | 4 NM Holding Pattern |
|              | 3100                 | 2700               | 2700                 | 3100                 |                      |
|              | *LNAV only.          | *1.1 NM to RW31    |                      |                      |                      |
|              |                      | 1700*              |                      |                      |                      |
|              |                      | 1.1 NM             | 1.5 NM               | 3.2 NM               | 6 NM                 |
| CATEGORY     | A                    | B                  | C                    | D                    |                      |
| LPV DA       | 1062-1 250 (300-1)   |                    |                      |                      |                      |
| LNAV/VNAV DA | 1255-1½ 443 (500-1½) |                    |                      |                      |                      |
| LNAV MDA     | 1220-1 408 (400-1)   |                    | 1220-1½ 408 (400-1½) |                      |                      |
| CIRCLING     | 1400-1 573 (600-1)   | 1420-1 593 (600-1) | 1620-2¼ 793 (800-2¼) | 1640-2¾ 813 (900-2¾) |                      |

NC-3, 01 OCT 2026 to 29 OCT 2026

NC-3, 01 OCT 2026 to 29 OCT 2026