


WAAS CH 78224 W10A	APP CRS 102°	Rwy Ldg 4650 TDZE 325 Apt Elev 378
--	------------------------	---

RNAV (GPS) RWY 10

SCHENECTADY COUNTY (SCH)

 NA	DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albany altimeter setting and increase all MDA 40 feet; increase LNAV Cat B and Circling Cat B/D visibility ¼ mile, and LNAV Cat C/D and Circling Cat C visibility ½ mile. Helicopter visibility reduction below 1 SM NA. Straight-in Rwy 10 NA at night, Circling Rwy 10 NA at night.			MISSED APPROACH: Climb to 3000 direct VEEYU and hold.	
	AWOS-3 119.275	ALBANY APP CON 132.825 263.075	SCHENECTADY TOWER ★ 121.3 (CTAF) 0 321.1	GND CON 121.9	UNICOM 122.95

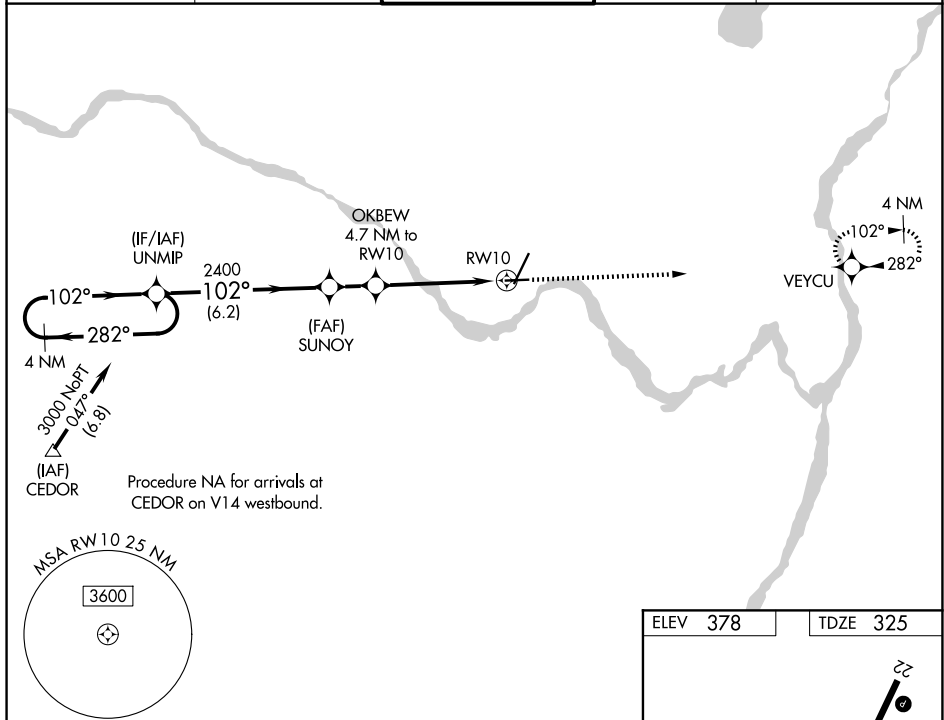

4 NM Holding Pattern

Visual Segment - Obstacles

3000

UNMIP

282°

102°

102°

2400

SUNOY

OKBEW
4.7 NM to
RW10

1860

RW10

6.2 NM

1.7 NM

4.7 NM

CATEGORY	A		B		C		D	
LP MDA	1220-1¼	895 (900-1¼)			1220-2½	895 (900-2½)		
LNAV MDA	1240-1¼	915 (900-1¼)			1240-2½	915 (900-2½)		
CIRCLING	1240-1¼	862 (900-1¼)			1240-2½ 862 (900-2½)	1320-3 942 (1000-3)		

TWR

0.3% UP

4850 X 150

28

102°

REIL Rwy 28

HIRL Rwy 4-22

MIRL Rwy 10-28