


WAAS CH 73035 W09A	APP CRS 094°	Rwy Ldg TDZE Apt Elev	5001 716 716
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9

WILLOW RUN (YIP)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct CIGAL and hold, continue climb-in-hold to 4000.	
Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.			
ATIS 127.425	DETROIT APP CON 118.95 284.0	WILLOW RUN TOWER 125.275 256.9	GND CON 119.975

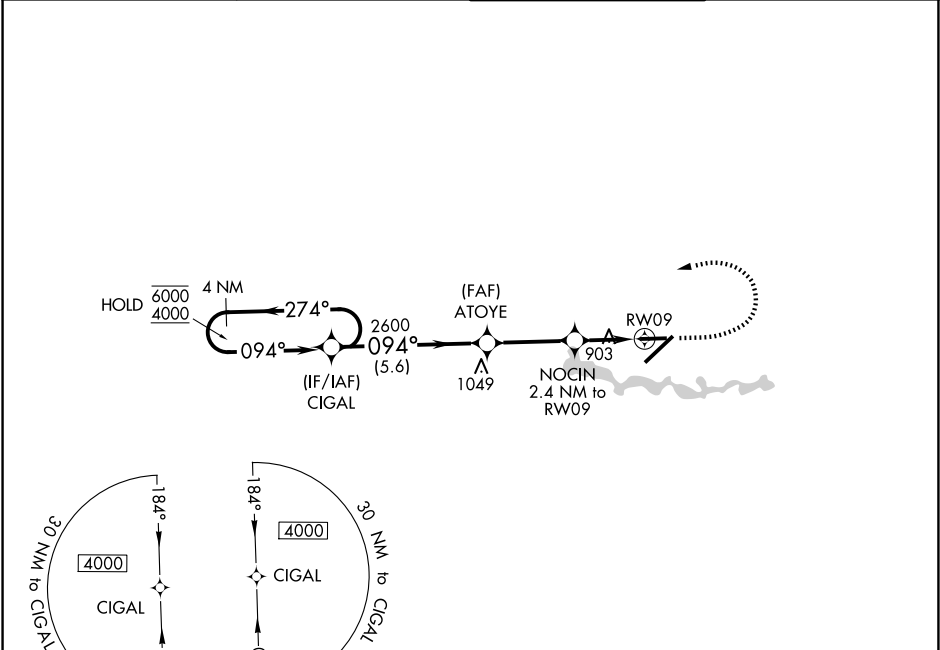

ELEV 716		D		TDZE 716	
4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40).			
CIGAL		ATOYE		CIGAL	
6000 ← 274° 4000 ← 094°		2600 1560			
GP 3.11° TCH 50		NOCIN 2.4 NM to RW09 1.3 NM to RW09			
5.6 NM		3.2 NM		1.2 NM	
1.3		RW09			
CATEGORY	A	B	C	D	
LPV DA	966-¾ 250 (300-¾)				
LNAV/VNAV DA	1201-1⅜ 485 (500-1⅜)				
LNAV MDA	1160-1	444 (500-1)	1160-1⅜ 444 (500-1⅜)		
CIRCLING	1220-1	504 (600-1)	1220-1½ 504 (600-1½)	1400-2¼ 684 (700-2¼)	

094°

5001 X 100

7543 X 50

TWR