

CLOVIS, NEW MEXICO

RNAV (GPS) RWY 4

|                          |                  |                              |                        |
|--------------------------|------------------|------------------------------|------------------------|
| WAAS<br>CH 41172<br>W04A | APCH CRS<br>038° | Rwy ldg<br>TDZE<br>Arpt Elev | 10,001<br>4284<br>4295 |
|--------------------------|------------------|------------------------------|------------------------|


(USAF)

CANNON AFB (KCVS)

|                                                                                                                                                                                                                                        |                                                                                                 |                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <p>▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile.<br/>** When ALS inop increase RVR to 60 vis to 1 1/8 miles.<br/>*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;<br/>CAT CDE RVR to 60, vis to 1 1/8 miles.</p> | <p>ALSF-1</p>  | <p>MISSED APPROACH: Climb to 7000 direct FETEP, then track to HEKDI and hold.</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|

|                     |                                 |                       |                        |
|---------------------|---------------------------------|-----------------------|------------------------|
| ATIS<br>119.1 269.9 | CANNON APP CON<br>118.425 352.1 | TOWER<br>120.4 270.25 | GND CON<br>121.9 275.8 |
|---------------------|---------------------------------|-----------------------|------------------------|

DME/DME RNP-0.3 NA  
For uncompensated Baro-VNAV systems,  
Procedure NA below 7°C (45°F) or above 54°C (130°F).

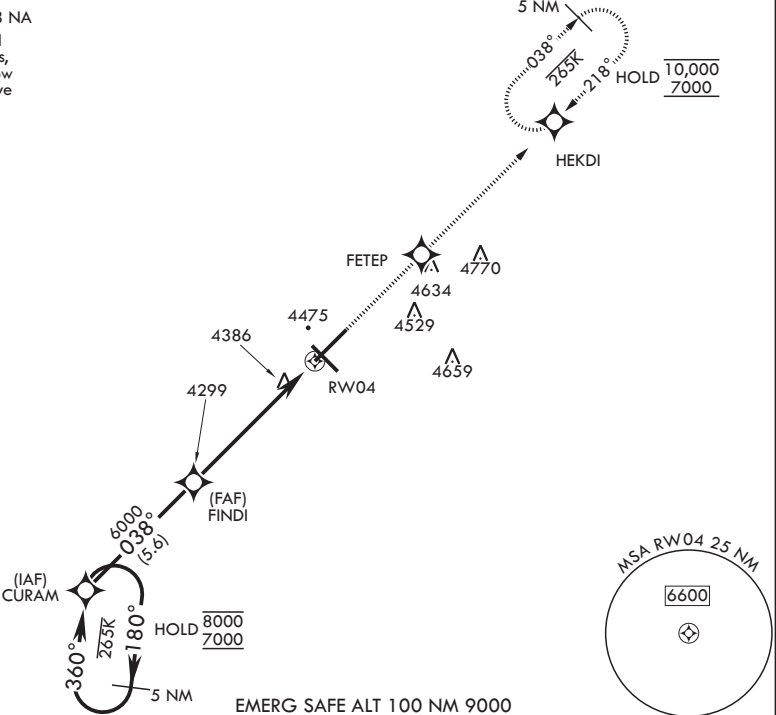

5 NM Holding Pattern

8000

7000

180°

360°

CURAM

GP 2.50°

TCH 46

VGSi and RNAV glidepath not coincident (VGSi angle 2.50/TCH 41).

7000

FETEP

ELEV 4295

TDZE 4284

038°

6000

FINDI

1.4 NM to RW04

RW04

6.3 NM

BCN

TWR

10001 x 150

0.3% UP

81°44' x 150

038°

| CATEGORY       | A                   | B | C                   | D                    | E                    |
|----------------|---------------------|---|---------------------|----------------------|----------------------|
| LPV DA*        | 4484/24             |   | 200                 | (200-½)              |                      |
| LNAV/VNAV DA** | 4700/40             |   | 416                 | (500-¾)              |                      |
| LNAV MDA***    | 4700/24 416 (500-½) |   | 4700/40 416 (500-¾) |                      |                      |
| CIRCLING       | 4840-1 545 (600-1)  |   | 4840-1½ 545 (600-½) | 4980-2¼ 685 (700-2¼) | 5020-2½ 725 (800-2½) |

HIRL all rwys

CLOVIS, NEW MEXICO

34°23'N - 103°19'W

CANNON AFB (KCVS)

Amdt 3 07OCT21

RNAV (GPS) RWY 4

SW-1, 01 OCT 2026 to 29 OCT 2026

SW-1, 01 OCT 2026 to 29 OCT 2026