

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>97600</b><br><b>W08A</b> | APP CRS<br><b>084°</b> | Rwy Ldg<br>TDZE <b>1440</b><br>Apt Elev <b>1442</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) Y RWY 8

LEWISTON/NEZ PERCE COUNTY (LWS)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.4°C (7°F) or above 34°C (93°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 5700 direct HOSOV and on track 058° to PETEZ and hold, continue climb-in-hold to 5700.

|                        |                                        |                                                 |                         |                         |
|------------------------|----------------------------------------|-------------------------------------------------|-------------------------|-------------------------|
| ASOS<br><b>135.575</b> | SEATTLE CENTER<br><b>123.95 290.55</b> | LEWISTON TOWER ★<br><b>119.4 (CTAF) 0 318.8</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|------------------------|----------------------------------------|-------------------------------------------------|-------------------------|-------------------------|

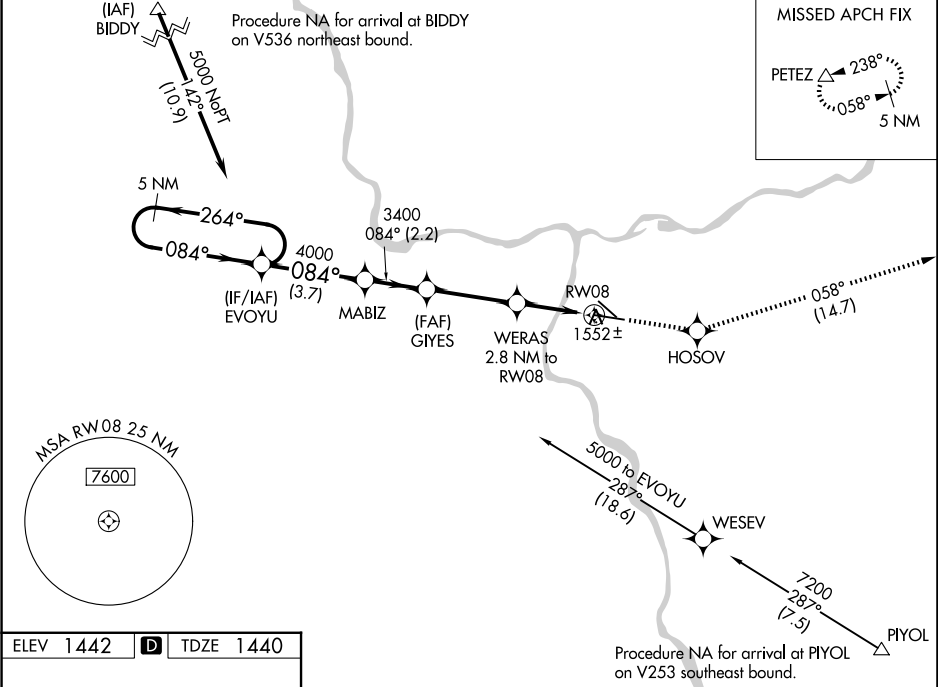

ELEV 1442

D

TDZE 1440

REIL Rwy 8

REIL Rwy 12

HIRL Rwy 8-26

MIRL Rwy 12-30

084°

5003 X 75

6511 X 150

TWR

AS

|                       |                    |              |       |        |                         |                         |                         |              |            |
|-----------------------|--------------------|--------------|-------|--------|-------------------------|-------------------------|-------------------------|--------------|------------|
| 5 NM Holding Pattern  |                    | EVOYU        | MABIZ |        | GIYES                   | 5700<br>↑               | HOSOV<br>✦              | tr 058°<br>↻ | PETEZ<br>△ |
| 5000 ← 264°<br>084° → |                    | 084°<br>4000 |       | 3400   | 3400                    | WERAS<br>2.8 NM to RW08 |                         | *LNAV only   |            |
| GP 3.00°<br>TCH 45°   |                    |              |       | 3400   | *2360                   | *1.1 NM to RW08         |                         | RW08         |            |
|                       |                    | 3.7 NM       |       | 2.2 NM | 3.3 NM                  | 1.7 NM                  | 1.1 NM                  |              |            |
| CATEGORY              | A                  | B            | C     | D      |                         |                         |                         |              |            |
| LPV DA                | 1690-¾ 250 (300-¾) |              |       |        |                         |                         |                         |              |            |
| LNAV/VNAV DA          | 1736-1 296 (300-1) |              |       |        |                         |                         |                         |              |            |
| LNAV MDA              | 1820-1 380 (400-1) |              |       |        | 1820-1½ 380 (400-1½)    |                         |                         |              |            |
| CIRCLING              | 2000-1 558 (600-1) |              |       |        | 2280-2½<br>838 (900-2½) |                         | 2500-3<br>1058 (1100-3) |              |            |