

WAAS CH 45703 W29A	APP CRS 287°	Rwy Ldg 5155 TDZE 41 Apt Elev 41
--	------------------------	---

RNAV (GPS) RWY 29

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)



RNP APCH - GPS.

⚠ Rwy 29 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Circling Rwy 11, 4R, 4L, and 22R NA at night. Baro-VNAV and VDP NA when using ARA altimeter setting. When local altimeter setting not received, use ARA altimeter setting and increase LPV DA to 320 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 320 feet and visibilities $\frac{1}{8}$ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D $\frac{1}{8}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM.


MISSED APPROACH: Climb to 2800 direct SUVDE and on track 273° to RAYNE and hold.

ATIS 134.05	LAFAYETTE APP CON★ 121.1 363.0	LAFAYETTE TOWER★ 118.5 (CTAF) 0 257.8	GND CON 121.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------	------------------

MISSED APCH FIX

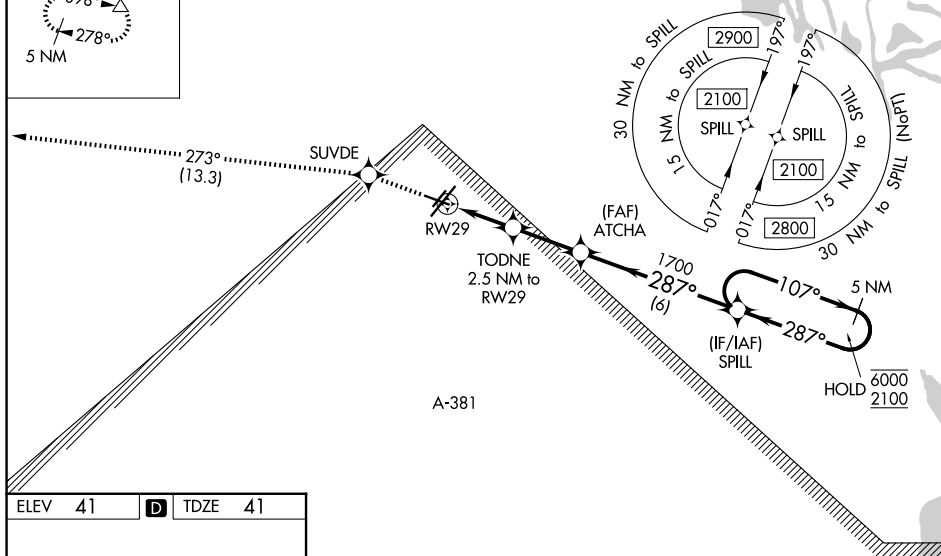

ELEV 41	D	TDZE 41
---------	----------	---------



REIL Rwys 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwy 4R-22L