


|             |         |              |
|-------------|---------|--------------|
| VOR/DME MFE | APP CRS | Rwy Ldg      |
| 117.2       | 134°    | 6983         |
| Chan 119    |         | TDZE 107     |
|             |         | Apt Elev 107 |

VOR RWY 14  
MC ALLEN INTL (MFE)

|                                                                                                                                                                                                                                                                                                                                          |                |                      |                                                                                             |        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------|---------------------------------------------------------------------------------------------|--------|
| <p>⚠ Circling NA northeast of Rwy 14-32. ADF or DME required. For inop MALSR, increase S-14 Cat C/D visibility to 1½ mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-14 Cat C/D and Circling Cat C visibility ½ mile. VDP NA when using Weslaco altimeter setting.</p> |                | MALSR                | MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold. |        |
| ATIS                                                                                                                                                                                                                                                                                                                                     | VALLEY APP CON | MC ALLEN TOWER ★     | GND CON                                                                                     | UNICOM |
| 128.5                                                                                                                                                                                                                                                                                                                                    | 126.55 377.2   | 118.5 (CTAF) 0 256.9 | 121.8                                                                                       | 122.95 |

ADF or DME REQUIRED

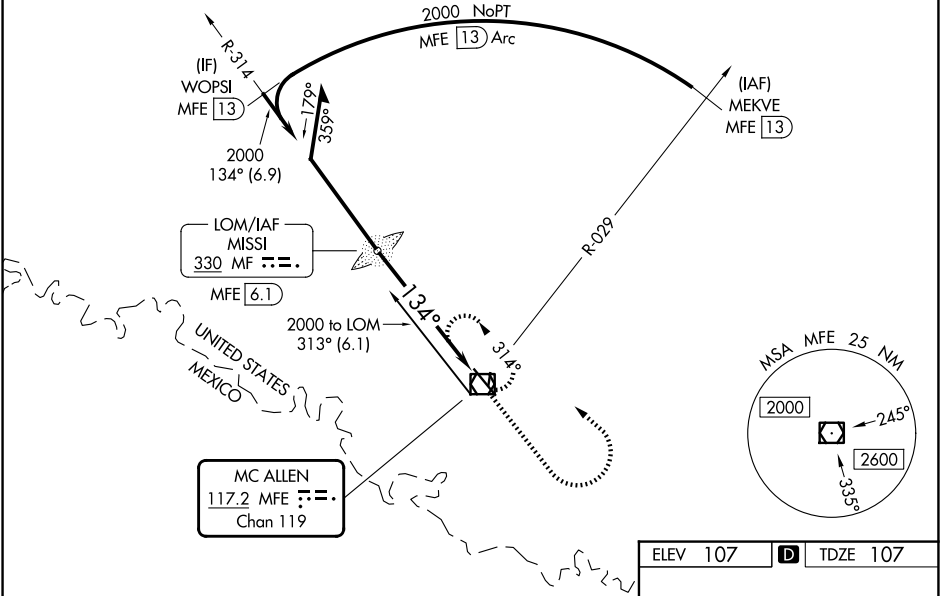

|                     |       |                      |             |              |      |         |
|---------------------|-------|----------------------|-------------|--------------|------|---------|
| Remain within 10 NM |       | MISSI MF LOM MFE 6.1 |             | 1000         | 2000 | MFE     |
| 2000                |       | 314°                 |             | 3.15°        |      | TCH 55  |
| 2000                |       | 134°                 |             | MFE 2.0      |      | MFE 0.6 |
|                     |       | 4.1 NM               |             | 1.4          |      |         |
| CATEGORY            | A     | B                    | C           | D            |      |         |
| S-14                | 620-½ | 513 (600-½)          | 620-1       | 513 (600-1)  |      |         |
| CIRCLING            | 620-1 | 513 (600-1)          | 620-1½      | 800-2¼       |      |         |
|                     |       |                      | 513 (600-½) | 693 (700-2¼) |      |         |

