LOC I-TWI	APP CRS	Rwy Ldg	10302
109.1	016°	TDZE	1314
		Apt Elev	1333

ILS or LOC RWY 1L


WICHITA DWIGHT D EISENHOWER NTL (ICT)


Simultaneous approach authorized with Rwy 1R.
For inoperative ALSF-2, increase S-ILS 1L Cat E visibility to RVR 4000 and S-LOC 1L Cat E visibility to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 3000 then climbing left turn to 3600 direct ICT VORTAC and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125.15	126.7 353.5	118.2 257.8	121.9 348.6

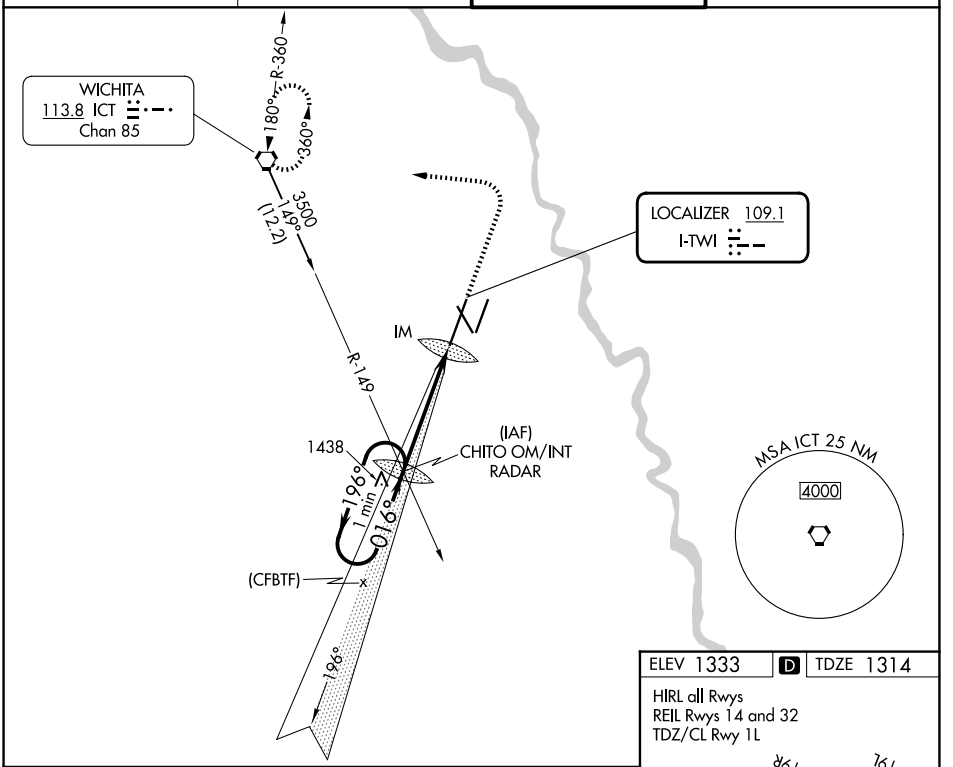

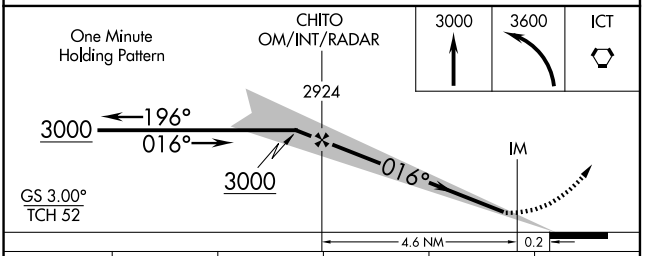

CATEGORY	A	B	C	D	E
S-ILS 1L	1514/18 200 (200-½)				
S-LOC 1L	1700/24 386 (400-½)			1700/40 386 (400-¾)	
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)

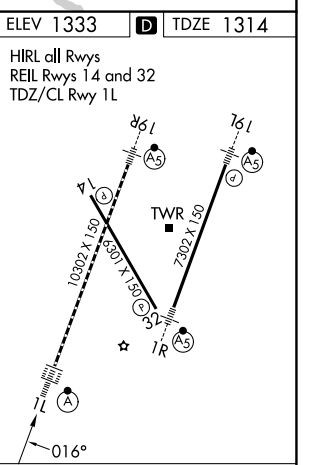

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

NC-2, 01 OCT 2026 to 29 OCT 2026
NC-2, 01 OCT 2026 to 29 OCT 2026