

TALLAHASSEE, FLORIDA

HI-VOR or TACAN RWY 36

VORTAC SZW 117.5 Chan 122	APCH CRS 353°	Rwy Idg 7001 TDZE 62 Arpt Elev 83
---	-------------------------	--

[USAF]


TALLAHASSEE INTL (KTLH)

DME required. RADAR required for procedure entry.





MISSED APPROACH: Climb to 4000 direct SZW VORTAC then on R-288 to QUILL (SZW R-288/11.8 DME) and hold.

ATIS	TALLAHASSEE APP CON ★	TOWER ★	GND CON	CLNC DEL	ASR
119.45 239.25	135.8 317.4 (001° - 180°) 128.7 254.3 (181° - 360°)	118.7 (CTAF) 0 257.8	121.9 348.6	126.65 275.8	

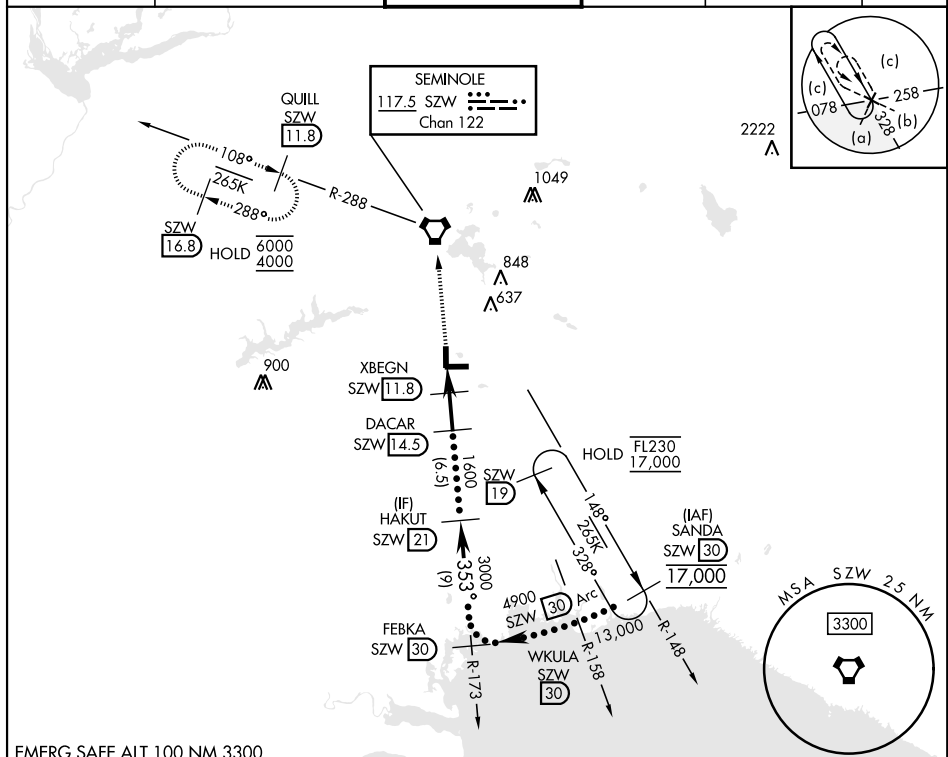

EMERG SAFE ALT 100 NM 3300

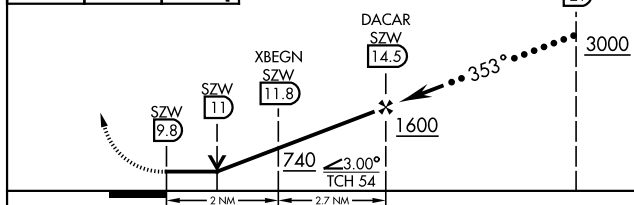

CATEGORY	C	D	E
S-36 *	460/35 398 (400-5%)		
CIRCLING	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)	1000-3 917 (1000-3)

ELEV 83 TDZE 62

81

7001 x 150 0.4% UP

P

A5

D

142

36

27

7999 x 150

A 143

210

353°

HIRL Rwy 9-27, 18-36

REIL Rwy 9, 18

TDZL/RCLS Rwy 27

TALLAHASSEE, FLORIDA

30 °24'N-84° 21'W

TALLAHASSEE INTL (KTLH)

Amdt 4 23JAN25

HI-VOR or TACAN RWY 36