

WAAS CH 90415 W09A	APP CRS 095°	Rwy Ldg TDZE 981 Apt Elev 981
--	------------------------	---

RNAV (GPS) RWY 9R

OAKLAND COUNTY INTL (PTK)

RNP APCH - GPS

▼


▲

Circling Rwy 9L, 36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 3000 direct
GUZVY and hold.

ATIS 125.025	DETROIT APP CON 132.35 284.0	PONTIAC TOWER ★ 120.5 (CTAF) 0	GND CON 121.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

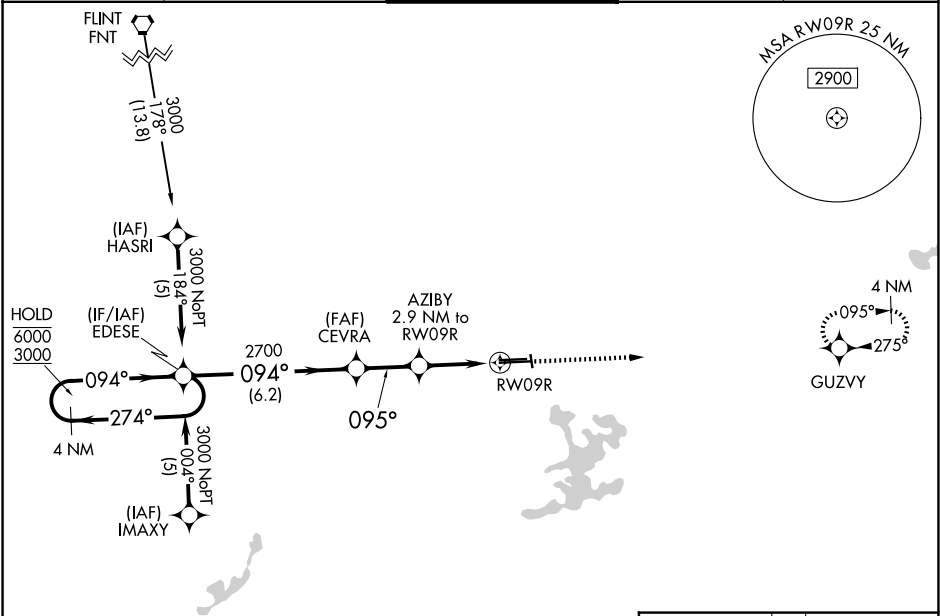

ELEV 981

D

TDZE 981

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

3000

GUZVY

6000

3000

274°

094°

094°

2700

1960

095°

1.2 NM to RWY 09R

RWY 09R

GP 3.00° TCH 55

6.2 NM

2.3 NM

1.7

1.2

CATEGORY	A	B	C	D
LPV DA*	1181/24 200 (200-½)			
LNAV/ VNAV DA	1420/40 439 (500-¾)			
LNAV MDA	1420/24 439 (500-½)	1420/40 439 (500-¾)		
CIRCLING	1540-1 559 (600-1)	1560-1 579 (600-1)	1640-1¾ 659 (700-1¾)	1640-2 659 (700-2)

HIRL Rwy 9R-27L

MIRL Rwy 9L-27R

REIL Rwy 27L

REIL Rwy 9L and 27R

095°

5676 X 100

6521 X 150

258

36

27R

9L

TWR

EC-1, 01 OCT 2026 to 29 OCT 2026

EC-1, 01 OCT 2026 to 29 OCT 2026